
# Joos De Ter Beerstlaan 33, 8740 PITTEM - BELGIUM Tel ++32(0)51 46 43 41 - Fax ++32(0)51 46 43 42 - info@tal.be - www.tal.be

# 40072: CONVERTER 230V LED 24V 100VA IP67



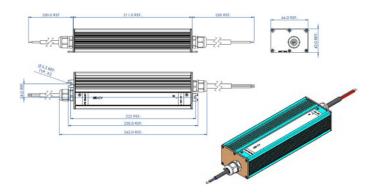

- Specifications may vary without notice
- Always consult National, State and local electrical codes
- Parameters are measured at rated output, rated load and at an ambient temperature of 25°C
- Expect slight variation including component tolerance, setup tolerance, line regulation and load regulation
- Power supplies should always be stress tested and tested for EMC within specific fixtures
- Where grounding/earthing is not indicated, avoid grounding/earthing or contact with grounded/earthed metal enclosures
- Performance with dimmers, where supported, may vary depending on dimmer model
- Subject to limited warranty (3yr for transformers, 5yr for drivers) terms and conditions as published from time to time

### **Specs**

Power: 100 W 50000 hrs Life:

# **Input specs**

Inrush current limiter: true Power factor: 0.99 0.5 - 0.5 A Input current: Input frequency: 0/50/60 Hz Input voltage: 220 - 240 V Efficiency: 92 %

# **Output specs**

Output voltage: 24 V Output voltage tolerance: 5 % Output current range: 4.2 - 4.2 mA

#### **Dimmable**

Dimmable: false

#### **Protections**

Over temperature protection: true Reinforced insulation: true Input voltage surge protection: true

#### **Environment**

Ta min: -25 °C IP: 67 Ta max: 70 °C Tc: 90 °C Storage temp.: -10 ... 70 °C

### Mechanical

Case color: white Weight: 0.8 kg Input wire size (mm²): 0.75 mm<sup>2</sup> Output wire color: black/red Case material: Aluminum Input wires color: blue/brown Output wire size (mm²) : 1.5 mm<sup>2</sup>