


40080: CONVERTER 230V LED 24V 20VA IP20 DIMMABLE 1-10V

Direct current dimmable electronic drivers multivoltage-multicurrent for power LED and LED modules

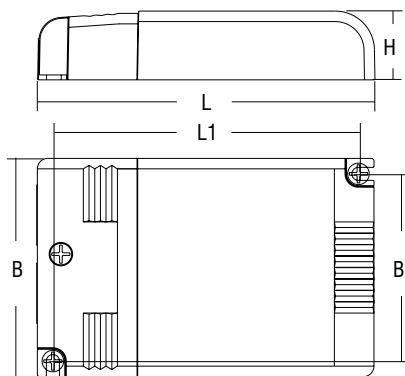

| Article | Code | W | V out DC | I out DC | n° LED max. @ 230 V | ta °C | tc °C | λ max. | Dimensions (mm) | | | | | Weight gr. | Pcs |
|--------------------------------|----------|----------|------------|-------------|---------------------|---------|-------|--------|-----------------|------|----|------|----|------------|-----|
| | | | | | | | | | L | L1 | B | B1 | H | | |
| Constant current output | | | | | | | | | | | | | | | |
| DC JOLLY | 122420 | 15 | 43 max. | 350mA cost. | 12 | -25 +50 | 75 | 0,98 | 103 | 93,5 | 67 | 57,5 | 21 | 110 | 50 |
| | | 22 (15*) | 43 max. | 500mA cost. | 11/12 | | | | | | | | | | |
| | | 25 (15*) | 36 max. | 700mA cost. | 9 | | | | | | | | | | |
| | | 9 | 10 cost. | 900mA max. | - | | | | | | | | | | |
| | | 10 | 12 cost. | 900mA max. | - | | | | | | | | | | |
| | 20 (15*) | 24 cost. | 900mA max. | - | | | | | | | | | | | |

- Reference Norms:**
 EN 50172 (VDE 0108)
 EN 55015
 EN 60598-2-22
 EN 61000-3-2
 EN 61347-1
 EN 61347-2-13
 EN 61547
 EN 62384
 VDE 0710-T14
- Rated Voltage**
 110 ÷ 240 V
- Frequency**
 50...60 Hz
- AC Operation range**
 100 ÷ 264 V
- DC Operation range**
 176 ÷ 264 V
 (NO PUSH mode function)
- Lamps:**
 Power LED
 LED modules
- Power**
 0 ÷ 25 W