
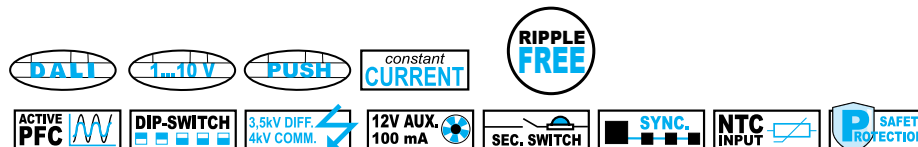


930557 POWERLED CONVERTOR REMOTE 2x 1-20W 500mA DALI DIMM

Direct current dimmable electronic drivers with DIP-SWITCH



Article Articolo	Code Codice	P out W	V out DC	I out DC	n° LED max. (1)	V out max.	ta °C	tc °C	λ max. Power Factor	η max. Efficiency (1)
DC MAXI JOLLY HV DALI	30	112 V max.	250 mA cost	30	119	-25...+50	80	0,95	> 89	
	40	112 V max.	350 mA cost	30						
	47	112 V max.	400 mA cost	28						
	50	110 V max.	450 mA cost.	27						
	50	100 V max.	500 mA cost.	25						
	50	91 V max.	550 mA cost.	22						
	50	83 V max.	600 mA cost.	20						
	50	70 V max.	700 mA cost.	18						

Reference Norms
 Norme di riferimento:
 EN 50172 (VDE 0108)
 EN 55015
 EN 61000-3-2
 EN 61000-3-3
 EN 61347-1
 EN 61347-2-13
 EN 61547
 EN 62384

Rated Voltage
 110 ÷ 240 V
 Frequency
 50...60 Hz
 AC Operation range
 99 ÷ 264 V
 DC Operation range
 DC 170 ÷ 280 V

Lamps
 Power LED
 LED modules

Power
 0 ÷ 20 W
 Max. ripple output
 current
 ≤ 3% (1)

Wiring diagram

