

name	ECLIPS TORNADO 5000lm		
ref	464347	ECLIPS TORNADO 5000lm 3000K LEAF	TEXTURED WHITE
	464357	ECLIPS TORNADO 5000lm 4000K LEAF	TEXTURED WHITE
	464326	ECLIPS TORNADO 5000lm 3000K LEAF	TEXTURED BLACK
	464336	ECLIPS TORNADO 5000lm 4000K LEAF	TEXTURED BLACK
ref	464447	ECLIPS TORNADO 5000lm 3000K TORSION	TEXTURED WHITE
	464457	ECLIPS TORNADO 5000lm 4000K TORSION	TEXTURED WHITE
	464426	ECLIPS TORNADO 5000lm 3000K TORSION	TEXTURED BLACK
	464536	ECLIPS TORNADO 5000lm 4000K TORSION	TEXTURED BLACK

GENERAL SPECIFICATIONS:

safe distance to object	☞ - 0,1m - ☜	
lamp / (lum.flux) / (colortemp)	PREVALED DC 4772lm/5071lm - 3000K/4000K	
fitting	none	Zhaga
watt / (Vf)	42,2W	Vf = 46.8V
current	900mA DC	
symbol		
gear	converter with FAN control not incorporated	
ip/class	IP20	
application	Interior - ceiling mounted	
orientability	359° rotating 30° tilt	
dimmiability	see converter	
weight	1.5	
beamangle	17°-24°-40° (see head)	
CRI	80	
SDCM	<3	

GENERAL ACCESSORIES:

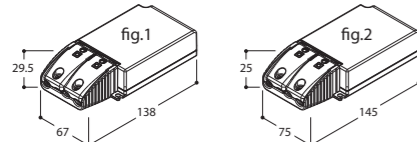


fig.1 930652 TORNADO REMOTE CONVERTER +WIRING (50W) FAN 1x5000lm 900mA
fig.2 930653 TORNADO REMOTE CONVERTER +WIRING (50W) FAN DALI DIM 1x5000lm 900mA

TABLE REFLECTOR SYSTEM


eclips TORNADO
.choose color of luminaire
.choose led luminous flux (lm)
.choose led color temperature (K)

TORNADO head 4629xx
.choose color of head
.choose beamangle of reflector


☉ TORNADO REFL. SYSTEM	17°	24°	40°
TEXT. WHITE	462917	462927	462947
TEXT. BLACK	462916	462926	462946
☉ HONEYCOMB BLACK ANO	700996		

DEDICATED DRIVERS: SEE CONVERTER TABLE
REMARK: ONE TORNADO REFLECTOR SYSTEM PER LEDMODULE


1 MAKE ROUND HOLE DIA 154mm WITH MIN. RECESSED DEPTH 220mm

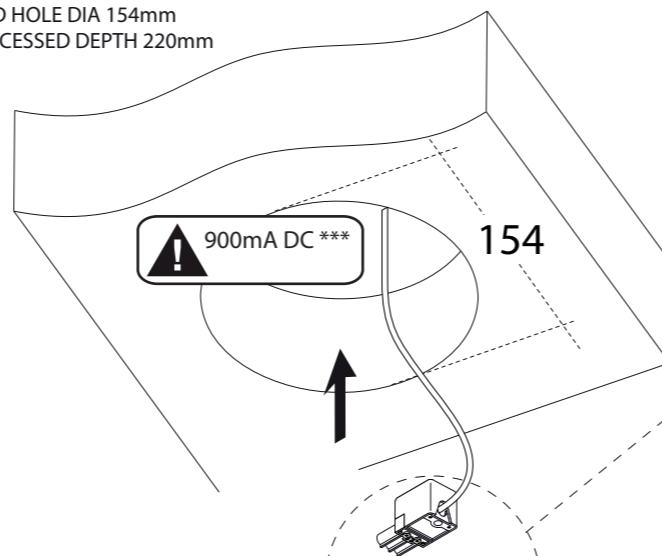


2 MAKE CONNECTION BETWEEN GEAR (NOT INCLUDED) AND LUMINAIRE ! MALE AND FEMALE CONNECTORS ARE INCLUDED !

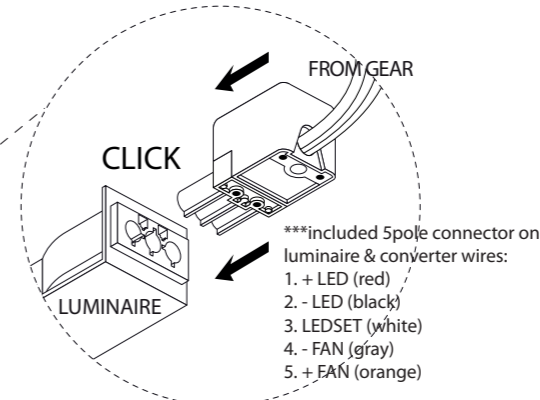

3 PUSH LUMINAIRE GENTLY INTO HOLE BY DEFORMING 2 SPRINGS BY HAND

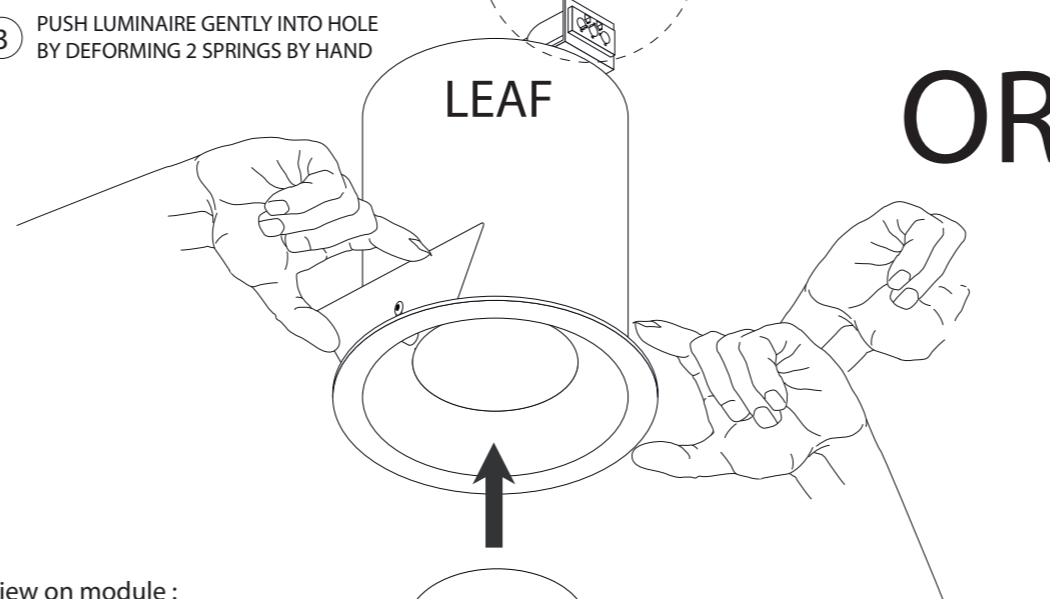

View on module :

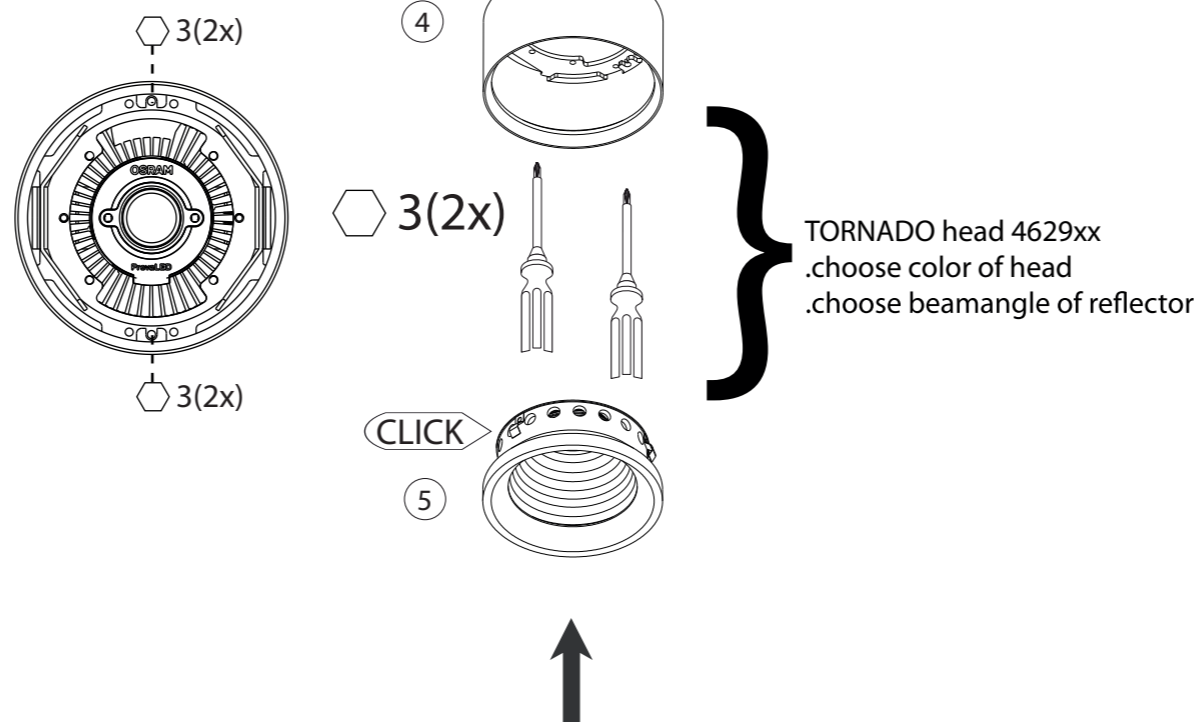

ALWAYS DISCONNECT MAINS POWER SUPPLY FROM CONVERTER BEFORE SWITCHING "ON" LED LUMINAIRES TO PREVENT HOT PLUGGING ISSUES