


CEDRUS FLEX

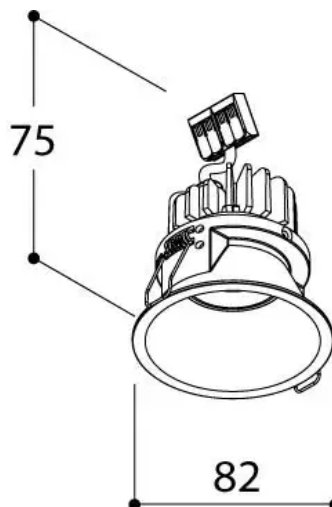

General Specifications

Article code	348737
Product name	CEDRUS QUANTUM FLEX TORSION 350mA 36° 2700K
Finish housing	TEXTURED BLACK
Adjustability tilt	20°
Adjustability rotation	No
Type de montage	DOWNLIGHTS
Cut-out	DIA 76 mm
Installation height	80 mm
Weight	0.2 kg
Location	Indoor
Indice de protection IP	20
Durée de vie des LED @ L80B10	50.000 hours
SDCM	3

Electrical Specifications

Input	350mA DC
Power	1 x 6,2 W
Forward voltage	1 x 17,7 V
Dimmable	DEPENDING ON DRIVER
Driver	REMOTE
Energy Efficiency Class	F
Electrical class	3
Efficacité des LED	96,8 lm/W

Photometric Specifications

température de la couleur	2700K
CRI	90
source lumineuse	BRIDGELUX
Flux sortant	1 x 600 lm
Luminaire output	1 x 495 lm
angle de faisceau	36°

Optional Accessories

[CEDRUS Q - FUNNEL FIX - MIX ROUND 6-13
FRAME FOR PLASTER \(348100\)](#)