
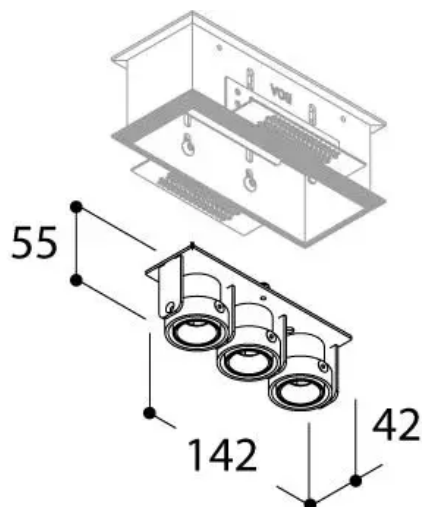


MICRO TOMMY 3 TRIMLESS

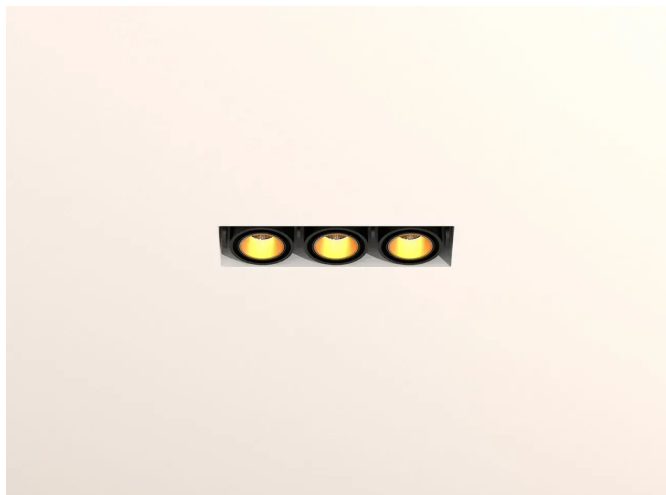

General Specifications

Article code	419076
Product name	MICRO TOMMY TRIMLESS 250mA HALOSPHERE
Finish housing	TEXTURED BLACK
Finish focus	GOLD ANO
Adjustability tilt	20°
Adjustability rotation	35°
Type de montage	TRIMLESS
Cut-out	175 x 75 mm
Installation height	80 mm
Weight	0.3 kg
Location	Indoor
Indice de protection IP	20
Durée de vie des LED @ L80B10	50.000 hours
SDCM	3

Electrical Specifications

Input	250mA DC
Power	3 x 4,25 W
Forward voltage	3 x 17 V
Dimmable	DEPENDING ON DRIVER
Driver	REMOTE
Energy Efficiency Class	E
Electrical class	3
Efficacité des LED	115 lm/W

Photometric Specifications

température de la couleur	1800-3000K
CRI	90
source lumineuse	BRIDGELUX
Flux sortant	3 x 455 lm
Luminaire output	3 x 389 lm
angle de faisceau	40°

Optional Accessories

[MICRO TOMMY TRIMLESS FRAME + BOX FOR PLASTER \(701178\)](#), [MICRO TOMMY TRIMLESS FRAME FOR PLASTERED CONCRETE SLABS \(701188\)](#)

Obligatory Accessories

Obligatory	MICRO TOMMY TRIMLESS FRAME FOR PLASTER (701118)
------------	---