


MICRO PIXL 14 RECESSED

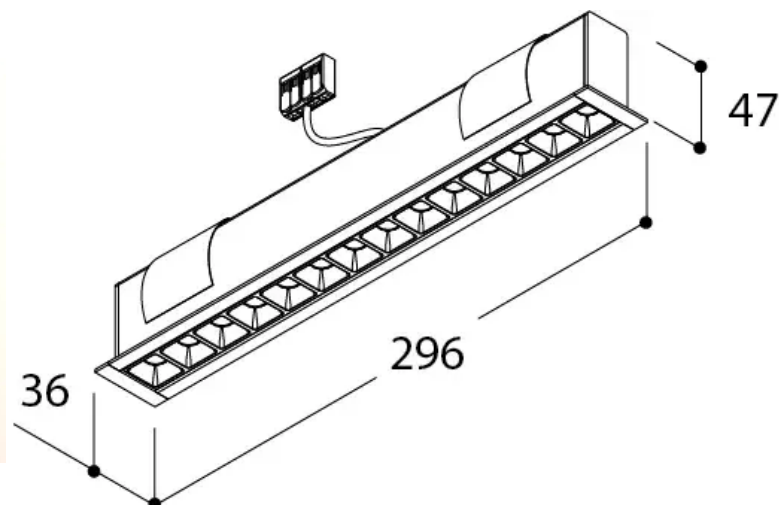

General Specifications

Article code	417716
Product name	MICRO PIXL 14 LEAF 3000K 65° WC
Finish housing	TEXTURED BLACK
Finish focus	TEXTURED BLACK
Adjustability tilt	No
Adjustability rotation	No
Type de montage	DOWNLIGHTS
Cut-out	30 x 288 mm
Installation height	55 mm
Weight	0.5 kg
Location	Indoor
Indice de protection IP	20
Durée de vie des LED @ L80B10	50.000 hours
SDCM	3

Electrical Specifications

Input	500mA DC
Power	1 x 9,76 W
Forward voltage	1 x 19,4 V
Dimmable	DEPENDING ON DRIVER
Driver	REMOTE
Energy Efficiency Class	C
Electrical class	3
Efficacité des LED	159 lm/W

Photometric Specifications

température de la couleur	3000K
CRI	90
source lumineuse	LEDARRAY L278
Flux sortant	1 x 1546 lm
Luminaire output	1 x 1391 lm
angle de faisceau	65°
UGR	19

Optional Accessories

[MICRO PIXL 14 FRAME FOR PLASTER \(417799\)](#),
[MICRO PIXL 14 FRAME + BOX FOR PLASTER
\(417797\)](#)