
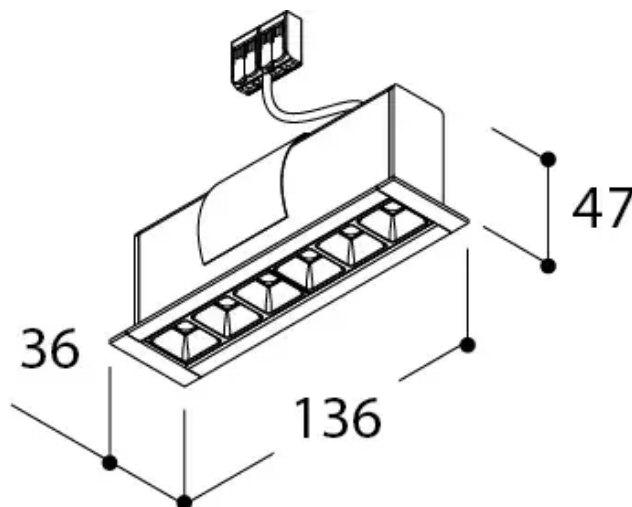


MICRO PIXL 6 RECESSED

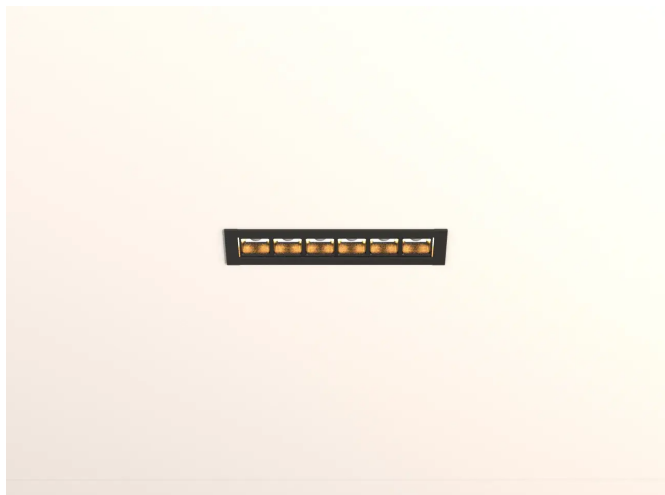

Algemene specificaties

Artikelcode	417616
Productnaam	MICRO PIXL 6 LEAF 3000K 65° WC
Afwerking	TEXTURED BLACK
Finish focus	TEXTURED BLACK
Adjustability tilt	No
Adjustability rotation	No
Mounting type	DOWNLIGHTS
Cut-out	30 x 128 mm
Installation height	55 mm
Gewicht	0.4 kg
Locatie	Indoor
IP rating	20
LED lifespan @L80B10	50.000 hours
SDCM	3

Elektrische specificaties

Input	180mA DC
Power	1 x 6,22 W
Forward voltage	1 x 34,6 V
Dimbaar	DEPENDING ON DRIVER
Driver	REMOTE
Energy Efficiency Class	C
Elektrische klasse	3
LED Efficiency	148 lm/W

Fotometrische specificaties

Kleurtemperatuur	3000K
CRI	90
Lichtbron	LEDARRAY L119
LED output	1 x 919 lm
Luminaire output	1 x 827 lm
Stralingshoek	65°
UGR	19

Optional Accessories

[MICRO PIXL 6 FRAME FOR PLASTER \(417699\)](#),
[MICRO PIXL 6 FRAME + BOX FOR PLASTER \(417697\)](#)