


Pixl4 recessed

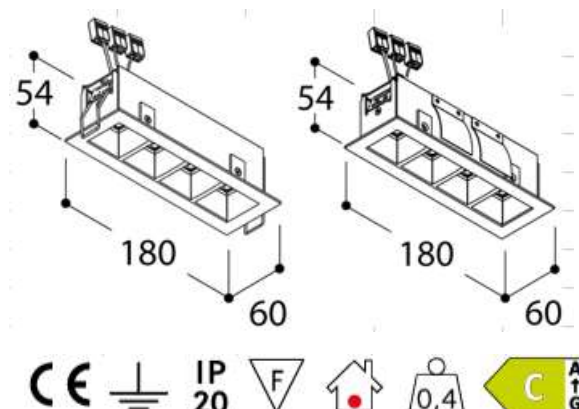

Luminaire specifications

Material	Aluminium
IP rating	IP 20
Use	Indoor - ceiling
Cut-out	52 x 170mm
Installation depth	60mm
Weight	330gr

Electrical

Driver	Incorporated
Dimmable	Mains dimmable RC
Connection	230V 50-60Hz AC
Dali	On request

Features

- * Energy saving: very high efficiency >140 lm/W
- * Available in 4- or 7-module version
- * Surface mounted or recessed
 - Recessed: Torsion or leaf springs
- * 230V power supply, converter incorporated
- * Mains dimmable & Dali dimmable possible
- * Available in :
 - Textured Black Powder coated
 - Textured white Powder coated
 - Any other color on request
- * Part of the quick ship family
- * Lighting lifespan 50.000h@L80B10
- * 5 years warranty

Light source

Type	Ledarray L139	
Power max	7,92W	
CRI	90	
Color Temperature (CCT)	2700K	3000K
LED output	1118 lm	1174 lm
LUMINAIRE output	1006 lm	1057 lm

Optics

UGR	< 19
Beam angle	50° - 80°
Adjustability	No

Accessories

Installation set	Frame + box for plaster
	Frame for plaster

Photometric data

