

CUSTOMER: _____
DATE: _____




PROJECT: _____

PROFILE REQUEST


2U R + 2U

PROFILE : 2U R H / 2U H not possible with alu cover


☐ 2U R H




☐ 2U R S



☐ 2U H



☐ 2U W



FINISH:

- ☐ Textured White ☐ Textured Black ☐ Silver Ano
Only for 2U

INSTALLATION:

- ☐ Recessed ☐ Wall mounted
With frontal lightoutput ☐ Wall mounted
With up or down light output ☐ Suspended
 ☐ Susp 2250mm
 ☐ Susp 4000mm
 ☐ Susp 6000mm ☐ Ceiling mounted
- Connection set
☐ Square
☐ Round
☐ Kosmos base recessed

CONFIGURATION:

Straight configuration

- Length (excluding endcaps): _____mm
- Thickness endcap = 8 mm for 2U R / 5 mm for 2U
- Number of sections (with straight connection): _____
- Profile length can be adapted to match exact module lenghts


- ☐ Yes
☐ No

Empty space to be covered by ☐ Diffuser

☐ Alu cover S or W

Other configuration

Please provide sketch in TOP VIEW with exact dimensions excluding endcaps.

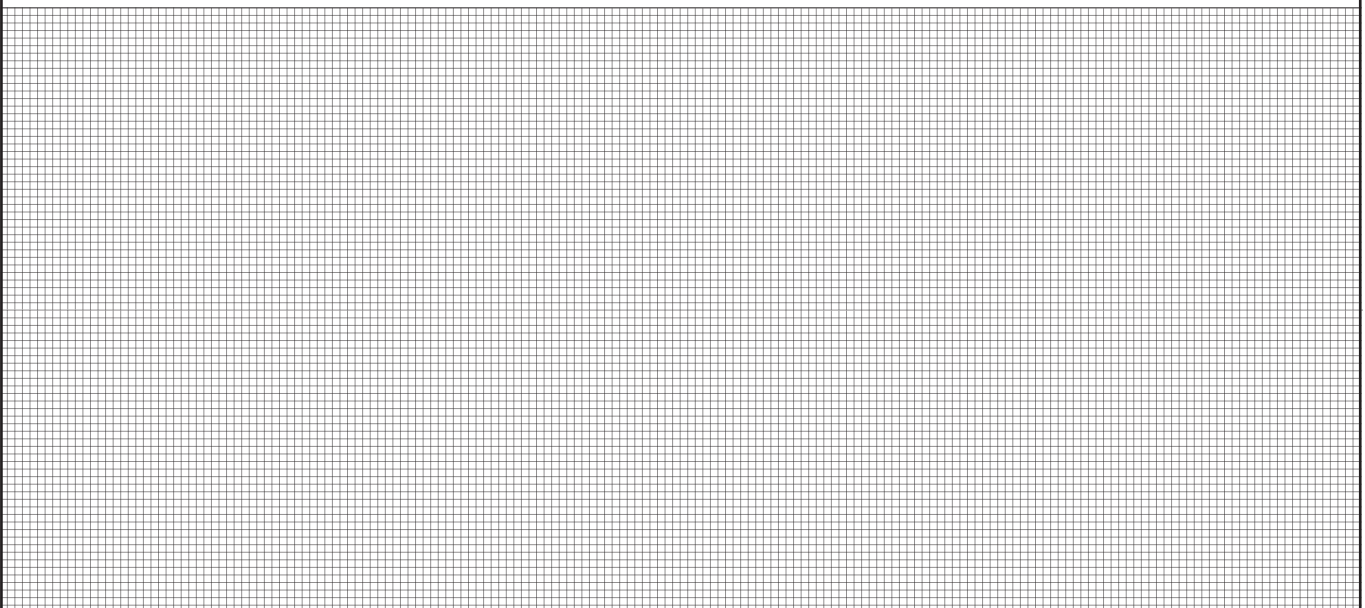

LIGHT MODULES:

LED SYSTEM DIFFUSER HE -2315lm/M (minimum length = 560mm) (2UH-2UW /2URS-2URH)

- | | | |
|--|--|--|
| ☐ 2700K Non - dimmable | ☐ 3000K Non - dimmable | ☐ 4000K Non - dimmable |
| ☐ 2700K Touch/DALI dimmable | ☐ 3000K Touch/DALI dimmable | ☐ 4000K Touch/DALI dimmable |

LED SYSTEM DIFFUSER HO -3925lm/M (minimum length = 560mm) (2UW / 2URS)

- | | | |
|--|--|--|
| ☐ 2700K Non - dimmable | ☐ 3000K Non - dimmable | ☐ 4000K Non - dimmable |
| ☐ 2700K Touch/DALI dimmable | ☐ 3000K Touch/DALI dimmable | ☐ 4000K Touch/DALI dimmable |

LED SYSTEM UGR 25°= UGR <12 (minimum length= 560mm) (2UW)

- | | | |
|--|--|--|
| ☐ HE = 1786lm/M | | |
| ☐ HO = 2786lm/M | ☐ 2700K Non - dimmable | ☐ 3000K Non - dimmable |
| | ☐ 2700K Touch/DALI dimmable | ☐ 3000K Touch/DALI dimmable |
| | ☐ 4000K Non - dimmable | ☐ 4000K Touch/DALI dimmable |

LED SYSTEM UGR 46°= UGR <19 (minimum length = 560mm) (2UW)

- | | | |
|--|--|--|
| ☐ HE = 1786lm/M | | |
| ☐ HO = 2786lm/M | ☐ 2700K Non - dimmable | ☐ 3000K Non - dimmable |
| | ☐ 2700K Touch/DALI dimmable | ☐ 3000K Touch/DALI dimmable |
| | ☐ 4000K Non - dimmable | ☐ 4000K Touch/DALI dimmable |

2UH-2UW /2URS-2URH

Ledline: Remote convertor Ledline 9.6W can be cut every 50mm, 14.4W en 19.2W every 33.33mm

- | | | |
|--|--|--|
| ☐ 2700K 9.6W/m | ☐ 3000K 9.6W/m | ☐ 4000K 9.6W/m |
| ☐ 2700K 14.4W/m | ☐ 3000K 14.4W/m | ☐ 4000K 14.4W/m |
| ☐ 2700K 19.2W/m | ☐ 3000K 19.2W/m | ☐ 4000K 19.2W/m |

2UW /2URS

Ledline: *converter incorporated Ledline 9.6W can be cut every 50mm, 14.4W en 19.2W every 33.33mm

- | | | |
|--|--|--|
| ☐ 2700K 9.6W/m | ☐ 3000K 9.6W/m | ☐ 4000K 9.6W/m |
| ☐ 2700K 14.4W/m | ☐ 3000K 14.4W/m | ☐ 4000K 14.4W/m |
| ☐ 2700K 19.2W/m | ☐ 3000K 19.2W/m | ☐ 4000K 19.2W/m |


2UW /2URS

Luxeon M modules mains dimmable (aluminium cover obligatory)

- | | | |
|--|---|---|
| ☐ Textured White | ☐ Textured Black | ☐ Gold |
| ☐ 2700K | ☐ 1x Luxeon M 400lm:.....QTY | ☐ 2x Luxeon M 400lm:.....QTY |
| ☐ 3000K | ☐ 3x Luxeon M 400lm:.....QTY | ☐ 4x Luxeon M 400lm:.....QTY |
| ☐ Halosphere 1800-3000K | | |

M10 Module (aluminium cover obligatory)

- | |
|---|
| ☐ M10 Module 230V |
| ☐ M10 Module 1x 250mA mains dimm |
| ☐ M10 Module 1x 350mA mains dimm |
| ☐ M10 Module 1x 700mA mains dimm |



ACCESSORIES:

-Extra circuit/M

☐ No

☐ Yes

☐ Common neutral

☐ No common neutral (for emergency purposes)

NOTE:

Please specify which light modules are to be on which circuit.

-Wall fixation (2U only)

☐ No

☐ YES



-For ledline: Converters to be supplied by TAL

☐ No

* ☐ YES

☐ non-dimmable

☐ dimmable 1-10V

☐ dimmable Touch/DALI

-Casambi module DALI

☐ No

☐ Yes

REMARKS: