


Profile/m 1U IP65


housing		€
text. white	952047	40,-
text. black	952026	40,-



+ MAX. SECTION LENGHT = 3 METRES


Straight Connection

		€
Straight connection	952060	30,-




Endcap

housing		€
text. white	952247	25,-
text. black	952226	25,-




Corner Connection

		€
Corner 90°	952070	30,-
Corner 135°	952080	30,-
Corner on request	952090	200,-




Diffuser/m

		€
Polycarbonate Diffuser	952006	40,-




Mounting springs for surface installation


		€
Spring	952905	3,-
+ 3 mounting springs per m		




+ Section view




+ Fixation on ceiling or wall

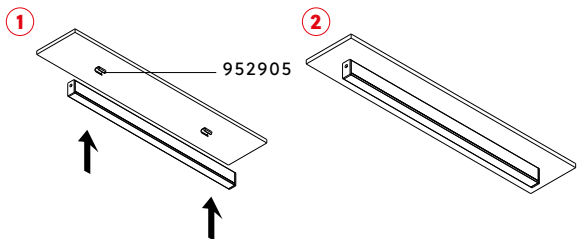


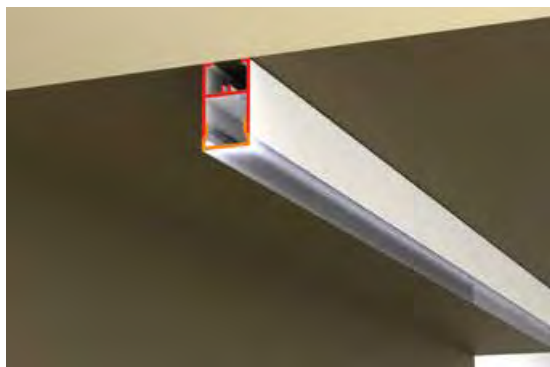

- i** Only electrical part is IP65, mechanical components remain IP40.
Horizontal surface mounted installation under canopy only.
Max. section length = 3 metres

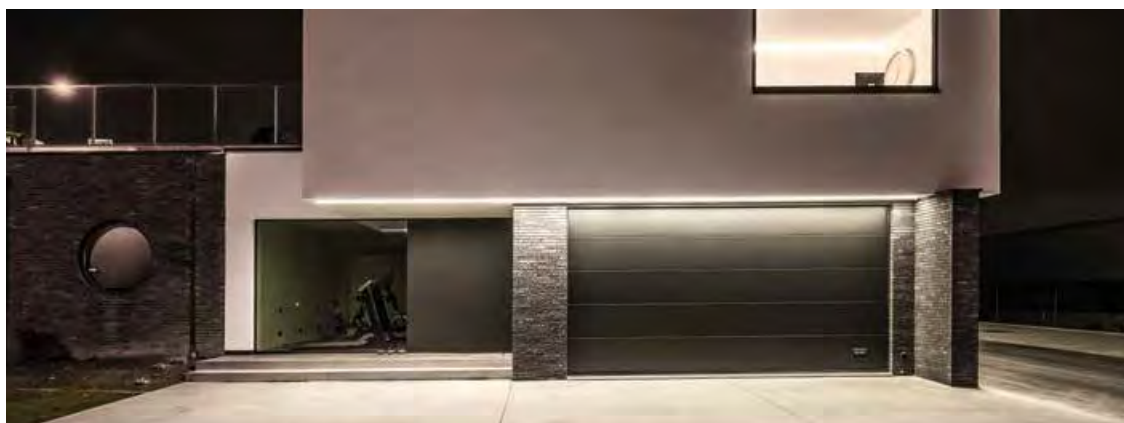

Module Ledline/m



24V DC

- i** polycarbonate diffuser included

	power		lumen output	CRI	max. length 1 powerfeed	min. cutting length	reference	€
2700K	medium power	9,6W/m	672 lm/m	92	5 metres	50 mm	952420	75,-
	high power	14,4W/m	1010 lm/m	92	5 metres	33,33 mm	952425	90,-
3000K	medium power	9,6W/m	710 lm/m	92	5 metres	50 mm	952430	75,-
	high power	14,4W/m	1060 lm/m	92	5 metres	33,33 mm	952435	90,-
4000K	medium power	9,6W/m	740 lm/m	92	5 metres	50 mm	952440	75,-
	high power	14,4W/m	1100 lm/m	92	5 metres	33,33 mm	952445	90,-

scan for
specsheet - price



Converter matrix,
see back flap

