


Profile/m 1U


housing		€
text. white	952047	40,-
silver ano	952012	40,-
text. black	952026	40,-



⊕ Max. section lenght = 3 metres


Straight Connection

		€
Straight connection	952060	30,-




Endcap

housing		€
text. white	952247	25,-
silver ano	952212	25,-
text. black	952226	25,-




Corner

		€
Corner 90°	952070	30,-
Corner 135°	952080	30,-
Corner on request	952090	200,-



Diffuser/m


		€
Polycarbonate Diffuser	952006	40,-




Mounting springs for surface installation

		€
Spring	952905	3,-


⊕ 2 mounting springs per m




⊕ Section view




⊕ Fixation on ceiling or wall

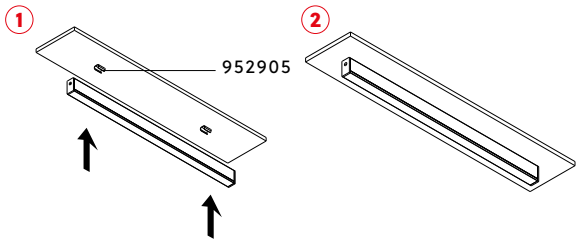

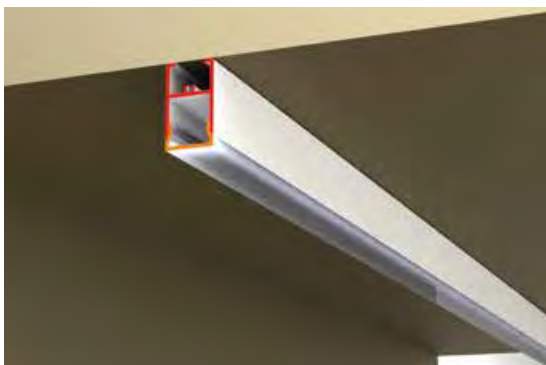

Module Ledline/m




24V DC

i polycarbonate diffuser included

	power		lumen output	CRI	max. length 1 powerfeed	min. cutting length	reference	€
2700K	medium power	9,6W/m	672 lm/m	92	5 metres	50 mm	952211	70,-
	high power	14,4W/m	1010 lm/m	92	5 metres	33,33 mm	952251	85,-
	very high power	19,2W/m	2208 lm/m	92	5 metres	33,33 mm	952311	100,-
3000K	medium power	9,6W/m	710 lm/m	92	5 metres	50 mm	952221	70,-
	high power	14,4W/m	1060 lm/m	92	5 metres	33,33 mm	952261	85,-
	very high power	19,2W/m	2208 lm/m	92	5 metres	33,33 mm	952321	100,-
4000K	medium power	9,6W/m	740 lm/m	92	5 metres	50 mm	952231	70,-
	high power	14,4W/m	1100 lm/m	92	5 metres	33,33 mm	952271	85,-
	very high power	19,2W/m	2323 lm/m	92	5 metres	33,33 mm	952331	100,-


Converter matrix,
see back flap

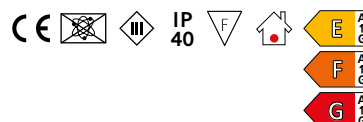

scan for
specsheet - price





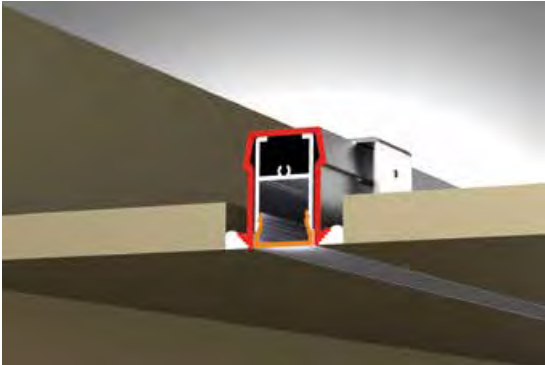

Profile/m 1U Flush

housing	€	
952035	30,-	

i Profile for recessed installation of 1U

Straight configuration
Length of profile 952035:

< 5 m = X + 8 mm
< 10 m = X + 9 mm
> 10 m = X + 12 mm

X = Length of 1U profile excl. endcaps

L - configuration

Length of profile 952035:

< 5 m = X + 5 mm on both sides
< 10 m = X + 6 mm on both sides
> 10 m = X + 8 mm on both sides

X = Length of 1U profile excl. endcaps

Endcap for plaster profile


housing	€	
952235	8,-	

Mounting brackets for recessed installation

9.5	12.5	15	18	€
9.5 mm	12.5 mm	15 mm	18 mm	
952900	952901	952902	952903	20,-

+ 2 mounting brackets per m (type according to ceiling thickness)


+ Section view



i Plasterprofile

- 1U profile to be added
- see installation manual for installation tolerances

+ Cut out dimensions

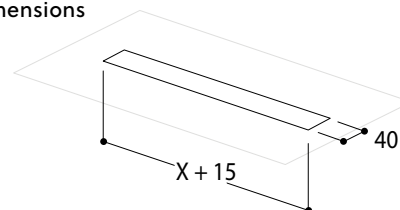

i X = Length of profile (measured without endcaps)
Installation depth: 50 mm



