



Profile/m 1U Slim

housing		€
text. white	954047	40,-
silver ano	954012	40,-
text. black	954026	40,-




+ MAX. SECTION LENGHT = 3 METRES

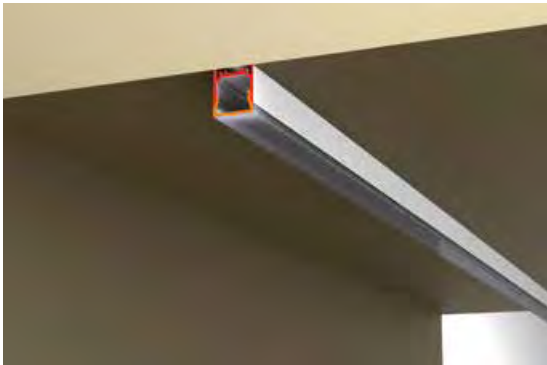


Endcap

housing		€
text. white	954247	25,-
silver ano	954212	25,-
text. black	954226	25,-




Endcap for side entry

housing		€
text. white	954347	25,-
silver ano	954312	25,-
text. black	954326	25,-




Diffuser/m

		€
Polycarbonate Diffuser	952006	40,-




Mounting springs for surface installation


		€
Spring	954905	3,-
+ Minimum 2 mounting springs per m		



+ Section view with springs




+ Section view without springs



ledline= length of profile
- 10mm *


maximum length between 2
screws is 1.8m ledline= length
of profile - 40mm **

+ Fixation on surface

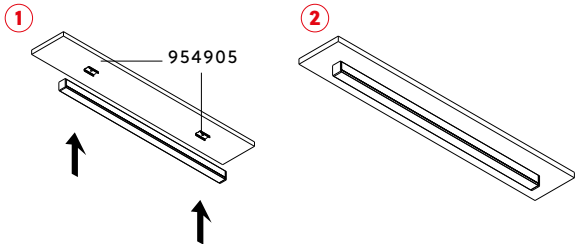




Multiple possibilities

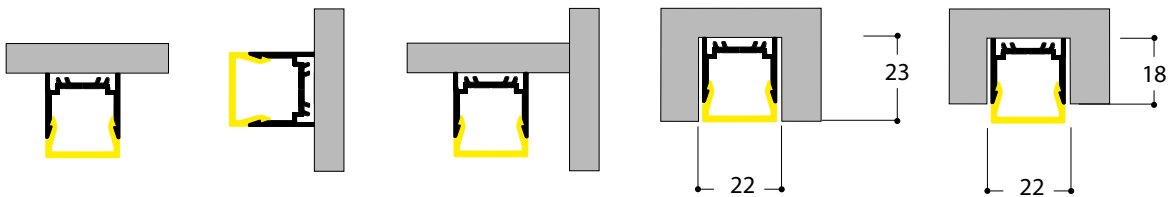

Module Ledline/m



24V DC


polycarbonate diffuser included

	power		lumen output	CRI	max. length 1 powerfeed	min. cutting length	reference	€
2700K	medium power	9,6W/m	672 lm/m	92	5 metres	50 mm	952211	70,-
	high power	14,4W/m	1010 lm/m	92	5 metres	33,33 mm	952251	85,-
3000K	medium power	9,6W/m	710 lm/m	92	5 metres	50 mm	952221	70,-
	high power	14,4W/m	1060 lm/m	92	5 metres	33,33 mm	952261	85,-
4000K	medium power	9,6W/m	740 lm/m	92	5 metres	50 mm	952231	70,-
	high power	14,4W/m	1100 lm/m	92	5 metres	33,33 mm	952271	85,-

scan for
specsheet - price




Converter matrix,
see back flap



A. Installation with springs


❶ Recommended for hollow ceiling, wall or cabinet

- ❶ Fix the mounting springs with the correct plugs + washers to the ceiling. Make sure they are carefully lined up. Min. 2 mounting springs per meter.
- ❷ Connect power supply with 1U Slim in the false ceiling or wall.

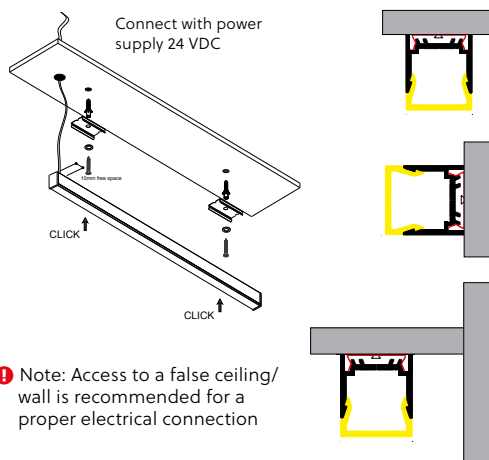

❶ Note: Access to a false ceiling/wall is recommended for a proper electrical connection


B. Installation for cove lighting

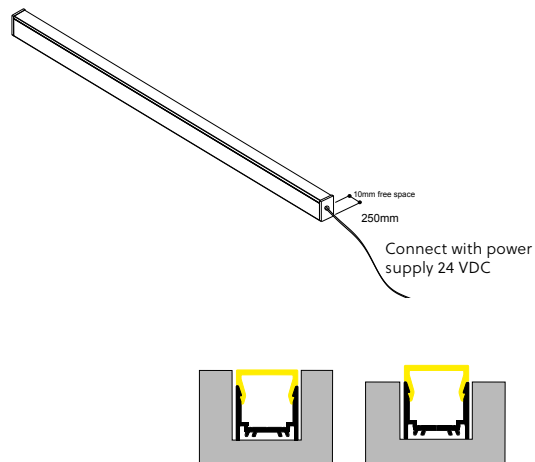


C. Installation without springs

❶ Only for hollow ceiling, wall or cabinet


- ❶ Remove diffuser
- ❷ Drill holes for mounting 20mm free space is provided at the end of both sides of the profile. Recommended screws, plug and drill hole dimensions depending on **surface type**.

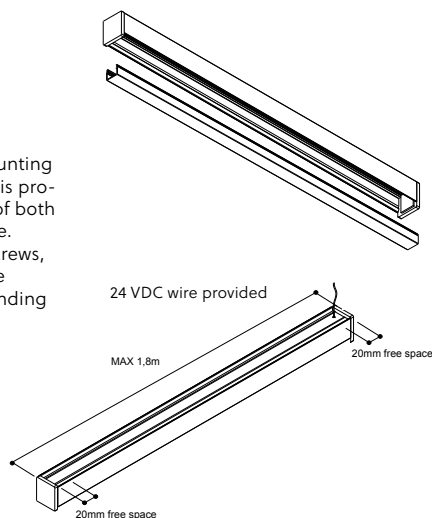


- ❸ Fixation on ceiling or wall and electrical connection

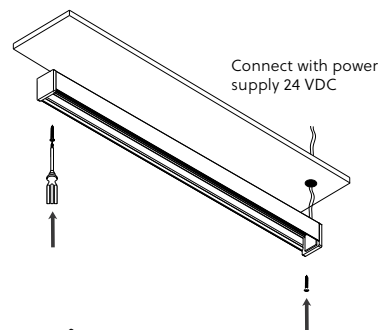

- ❹ Snap diffuser on the profile



❶ Note: Access to a false ceiling/wall is recommended for a proper electrical connection

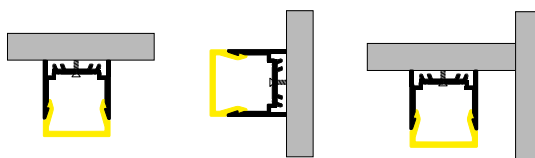

1U Slim





How to compose 1U Slim

REQUEST CUSTOMER

VERY SLIM PROFILE APPROX. 2M

BLACK COLOR

WARM WHITE (RESIDENTIAL)

CEILING MOUNTED

+ CONVERTER (REMOTE)

TAL

Orderform

REF	DESCRIPTION	PCS/M
954026	1U SLIM PROFILE TEXTURED BLACK	1,96
952211	LEDLINE 2700K MEDIUM POWER	1,95
952210	ENDCAP TEXTURED BLACK	2
954905	MOUNTING SPRING	3
952006	DIFFUSER	0,01
40057	CONVERTER 230V 24V 20VA	1

Drawing

+ Section view

