


Profile/m 1U Wall

housing		€
text. white	955047	40,-
silver ano	955012	40,-
text. black	955026	40,-




+ MAX. SECTION LENGHT = 3 METRES




Endcap left

housing		€
text. white	955248	25,-
silver ano	955213	25,-
text. black	955227	25,-




Endcap right

housing		€
text. white	955247	25,-
silver ano	955212	25,-
text. black	955226	25,-



Diffuser/m


		€
Polycarbonate Diffuser	952006	40,-




Mounting springs for surface installation

		€
Spring	952905	3,-


+ Minimum 2 mounting springs per 0,6 m




+ Section view




+ Fixation on wall

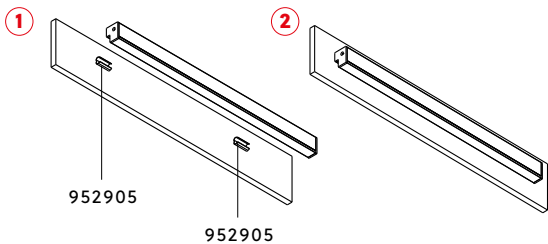

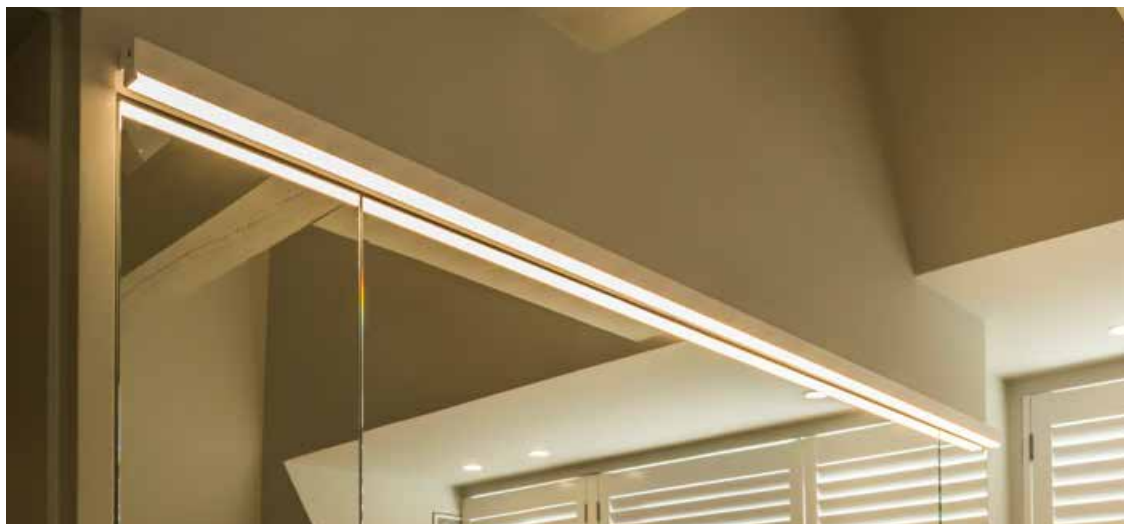


Installation

Fix the mounting springs with the correct plugs and washer on the wall. Make sure they are carefully lined up. 2 mounting springs per 0.6 meter.

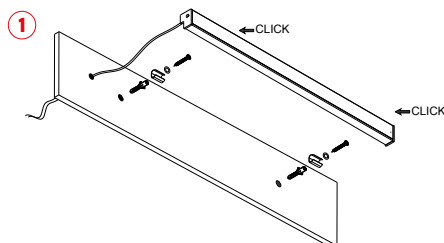

Module Ledline/m



24V DC


polycarbonate diffuser included

	power		lumen output	CRI	max. length 1 powerfeed	min. cutting length	reference	€
2700K	medium power	9,6W/m	672 lm/m	92	5 metres	50 mm	952211	70,-
	high power	14,4W/m	1010 lm/m	92	5 metres	33,33 mm	952251	85,-
	very high power	19,2W/m	2208 lm/m	92	5 metres	33,33 mm	952311	100,-
3000K	medium power	9,6W/m	710 lm/m	92	5 metres	50 mm	952221	70,-
	high power	14,4W/m	1060 lm/m	92	5 metres	33,33 mm	952261	85,-
	very high power	19,2W/m	2208 lm/m	92	5 metres	33,33 mm	952321	100,-
4000K	medium power	9,6W/m	740 lm/m	92	5 metres	50 mm	952231	70,-
	high power	14,4W/m	1100 lm/m	92	5 metres	33,33 mm	952271	85,-
	very high power	19,2W/m	2323 lm/m	92	5 metres	33,33 mm	952331	100,-

scan for
specsheet - price



Converter matrix,
see back flap

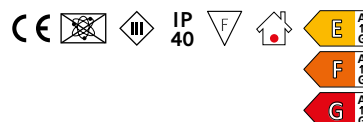



How to compose 1U Wall

REQUEST CUSTOMER

SLIM PROFILE FOR WALL MOUNTING
APPROX. 7M

WHITE COLOR

WARM WHITE HIGH OUTPUT

HIGH COLOR RENDERING

+ CONVERTER DIMMABLE 1/10V

TAL

Orderform

REF	DESCRIPTION	PCS/M
955047	1U WALL PROFILE TEXTURED WHITE	6,996
952251	LEDLINE 2700K HIGH POWER CRI 92	6,996
955247	ENDCAP RIGHT TEXTURED WHITE	1
955248	ENDCAP LEFT TEXTURED WHITE	1
952905	SPRING	8
40084	CONVERTER 230V 24V 120VA DIMM 1/10V	1

Drawing

+ Section view

