


Profile/m 1U


housing		€
text. white	952047	40,-
silver ano	952012	40,-
text. black	952026	40,-



⊕ Max. section lenght = 3 metres


Straight Connection

		€
Straight connection	952060	30,-




Endcap

housing		€
text. white	952247	25,-
silver ano	952212	25,-
text. black	952226	25,-




Corner

		€
Corner 90°	952070	30,-
Corner 135°	952080	30,-
Corner on request	952090	200,-



Diffuser/m


		€
Polycarbonate Diffuser	952006	40,-




Mounting springs for surface installation

		€
Spring	952905	3,-


⊕ 2 mounting springs per m




⊕ Section view




⊕ Fixation on ceiling or wall

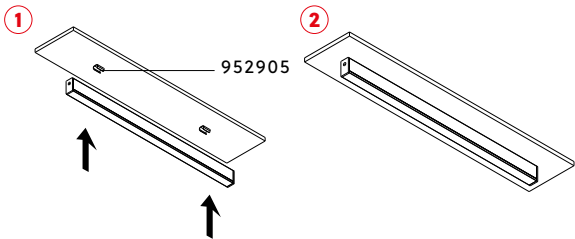

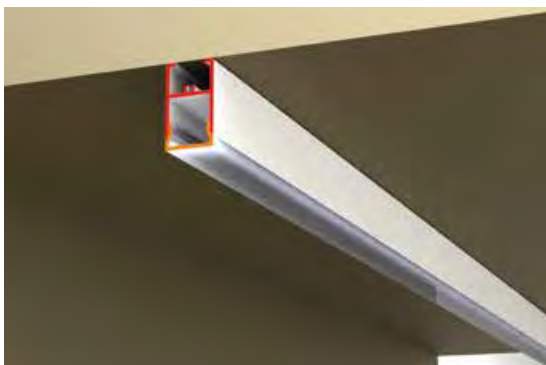

Module Ledline/m




24V DC

i polycarbonate diffuser included

	power		lumen output	CRI	max. length 1 powerfeed	min. cutting length	reference	€
2700K	medium power	9,6W/m	672 lm/m	92	5 metres	50 mm	952211	70,-
	high power	14,4W/m	1010 lm/m	92	5 metres	33,33 mm	952251	85,-
	very high power	19,2W/m	2208 lm/m	92	5 metres	33,33 mm	952311	100,-
3000K	medium power	9,6W/m	710 lm/m	92	5 metres	50 mm	952221	70,-
	high power	14,4W/m	1060 lm/m	92	5 metres	33,33 mm	952261	85,-
	very high power	19,2W/m	2208 lm/m	92	5 metres	33,33 mm	952321	100,-
4000K	medium power	9,6W/m	740 lm/m	92	5 metres	50 mm	952231	70,-
	high power	14,4W/m	1100 lm/m	92	5 metres	33,33 mm	952271	85,-
	very high power	19,2W/m	2323 lm/m	92	5 metres	33,33 mm	952331	100,-

Converter matrix,
see back flap

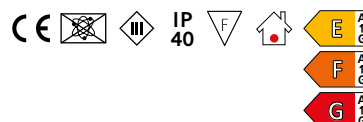

scan for
specsheet - price






Suspension Single

housing	2,25m	€	4 m	€	6 m	€
text. white	952041	30,-	952021	40,-	952051	50,-
silver ano	952040	30,-	952020	40,-	952050	50,-
text. black	952042	30,-	952022	40,-	952052	50,-


⊕ 1 suspension/ 1,5 m profil min. 2 suspensions



Connection Set Square

housing	2,25m	€	4 m	€	6 m	€
text. white	691050	57,-	691150	67,-	691250	84,-
text. black	691039	57,-	691139	67,-	691239	84,-


2P



Connection Set Round

housing	2,25m	€	4 m	€	6 m	€
text. white	691049	67,-	691149	82,-	691249	96,-
text. black	691038	67,-	691138	82,-	691238	96,-

2P



Connection Set Kosmos (recessed)


housing	2,25m	€	4 m	€	6 m	€
text. white	691048	83,-	691148	95,-	691248	111,-
text. black	691037	83,-	691137	95,-	691237	111,-

2P

⊕ Can be used as access point for converter

56 mm
Installation depth 60 mm

ⓘ Can be used as access point for converter





How to compose 1U

REQUEST CUSTOMER

SLIM PROFILE 2 M
WHITE COLOR
LED 2700K HP 24V
INSTALLED ON CEILING

+ CONVERTOR


TAL

Orderform

REF	DESCRIPTION	PCS/M
952047	PROFILE TEXT WHITE	2
952247	ENDCAP TEXT WHITE	2
952251	MODULE LEDLINE 2700 HP	2
952905	MOUNTING SPRING	3
40070	CONVERTER 35W 24V	1

Drawing

TOP VIEW

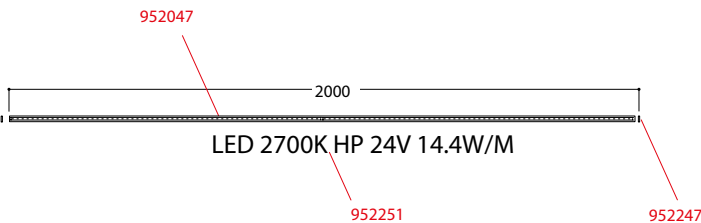

+ Section view

