


CUSTOMER: _____
DATE: _____



PROJECT: _____

PROFILE REQUEST PROTUT

PROFILE :



- ❗ The Protut profile can be used as a custom M10 base
- ❗ The Protut profile can be used in climate ceilings

FINISH:

☐ Textured White

☐ Textured Black

INSTALLATION:

☐ Climate ceiling

☐ Suspended

☐ Ceiling mounted

- ☐ Susp 2250mm
- ☐ Susp 4000mm
- ☐ Susp 6000mm

Connection set

- ☐ Square
- ☐ Round
- ☐ Kosmos base recessed

CONFIGURATION : Straight configuration

- Length (excluding endcaps): _____mm
- Thickness endcap= 3mm
- Number of sections (with straight connection): _____
- Profile length can be adapted to match exact module lengths

- ☐ YES
- ☐ No

Empty space to be covered by ☐ Diffuser
☐ Alu cover

Other configuration

Please provide sketch in TOP VIEW with exact dimensions excluding endcaps.



LIGHT MODULES:

LEDSYSTEM DIFFUSER HE - 2315lm/M (minimum length = 840mm)

- ☐ 2700K Non-dimmable
- ☐ 3000K Non-dimmable
- ☐ 4000K Non-dimmable
- ☐ 2700K Touch/DALI dimmable
- ☐ 3000K Touch/DALI dimmable
- ☐ 4000K Touch/DALI dimmable

LEDSYSTEM DIFFUSER HO - 3925lm/M (minimum length = 840mm)

- ☐ 2700K Non-dimmable
- ☐ 3000K Non-dimmable
- ☐ 4000K Non-dimmable
- ☐ 2700K Touch/DALI dimmable
- ☐ 3000K Touch/DALI dimmable
- ☐ 4000K Touch/DALI dimmable

LEDSYSTEM UGR 25°= UGR <12 (minimum length = 560mm)

- ☐ HE = 1786lm/M
- ☐ HO = 2786lm/M
- ☐ 2700K Non-dimmable
- ☐ 3000K Non-dimmable
- ☐ 4000K Non-dimmable
- ☐ 2700K Touch/DALI dimmable
- ☐ 3000K Touch/DALI dimmable
- ☐ 4000K Touch/DALI dimmable


LEDSYSTEM UGR 46°= UGR <19 (minimum length = 560mm)

- ☐ HE = 1786lm/M
- ☐ HO = 2786lm/M
- ☐ 2700K Non-dimmable
- ☐ 3000K Non-dimmable
- ☐ 4000K Non-dimmable
- ☐ 2700K Touch/DALI dimmable
- ☐ 3000K Touch/DALI dimmable
- ☐ 4000K Touch/DALI dimmable


Protut Module M10

(aluminium cover, mounting springs for M10 and fall protection are mandatory)


☐ 230V

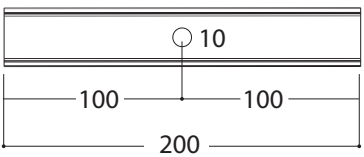

☐ 350 mA mains dimmable

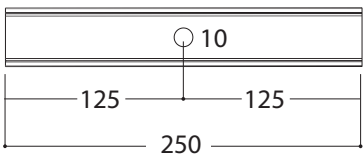

☐ 350 mA Dali (min. 2xM10)

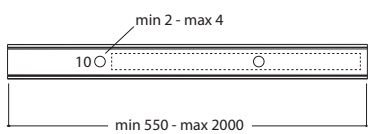

- ☐ 2 x M10
- ☐ 3 x M10
- ☐ 4 x M10

REMARKS:

.....

.....

.....

.....

.....

.....