



Mix 13W

(See www.mixconfigurator.be)

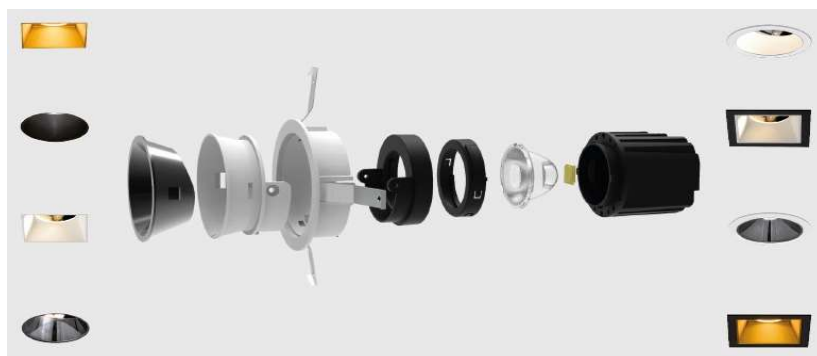

- 76 mm
- 76x76 mm
- 30°
(only FLEX)
- 359°
(only ROUND FLEX)



Luminaire specifications

Material	Aluminium housing PC ABS Focus
IP rating	IP 54
Use	Indoor-Ceiling recessed
Cut-out	Ø 76mm / 76x76 mm
installation depth	Height + 5mm
Weight	300gr

Light source

Type	Citizen		Brigdelux	
Power max	13,5W		11,8W	
CRI	90			
Color Temperature	2700K	3000K	4000K	1800-3000K
LED output	1444 lm	1506 lm	1556 lm	1265 lm
LUMINAIRE output	1184 lm	1235 lm	1276 lm	1037 lm
LUMEN per Watt	107	112	115	107

Electrical

Driver	Remote	
Dimmable	PWM/CCR	
Connection	350mA DC serial	
Voltage Forward (VF)	38,6V	33,8V

Optics


UGR	Not applicable
Material	PMMA
Beam angle	15° - 24° - 36° - 60°
Vertical Adjustable	30° (only FLEX)
Horizontal Adjustable	359° (only Round FLEX)

Features

- * Energy saving - high luminaire output
- * LED lifespan 50.000 hours @L80B10
- * SDCM = 3
- * 5 years warranty
- * Modular concept:
all components (LED, lens, focus, frontring)
are interchangeable

Accessories

Frame	Frame for plastered slabs Frame for Plaster
Box	Frame + box for plastered concrete
Honeycomb	Opal Disc
MX100090	MX100091



Article number Definition:

PREFIX	DIGIT1	DIGIT2	DIGIT3	DIGIT4	DIGIT5
Type	Model	Beam angle	Colour temp LED	Focus Colour	Front Colour
MX1	1: Round 2: Round Flex 3: Trimless Round 4: Trimless Round Flex 5: Square 6: Square Flex 7: Trimless Square 8: Trimless Square Flex	N: 15° T: 24° M: 36° W: 60°	1: 1800-3000K 2: 2700K 3: 3000K 4: 4000K	1: Matt White 2: Matt Black 3: Matt Gold 4: Black Chrome	6: Textured Black 7: Textured White 0: Trimless


Example

MX13W110 Mix 13Watt Trimless Round - 60° - Halosphere - Matt white focus - Trimless front


Mix 13W

(See www.mixconfigurator.be)


Photometric data (Example 2700K)

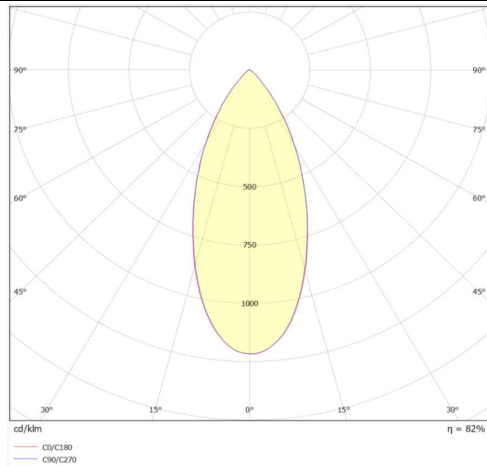

Frames & Boxes (Trimless => Height 24mm instead of 12mm)

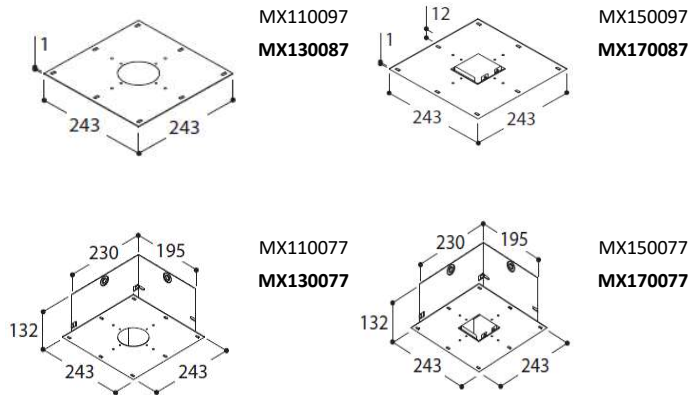

Dimensions

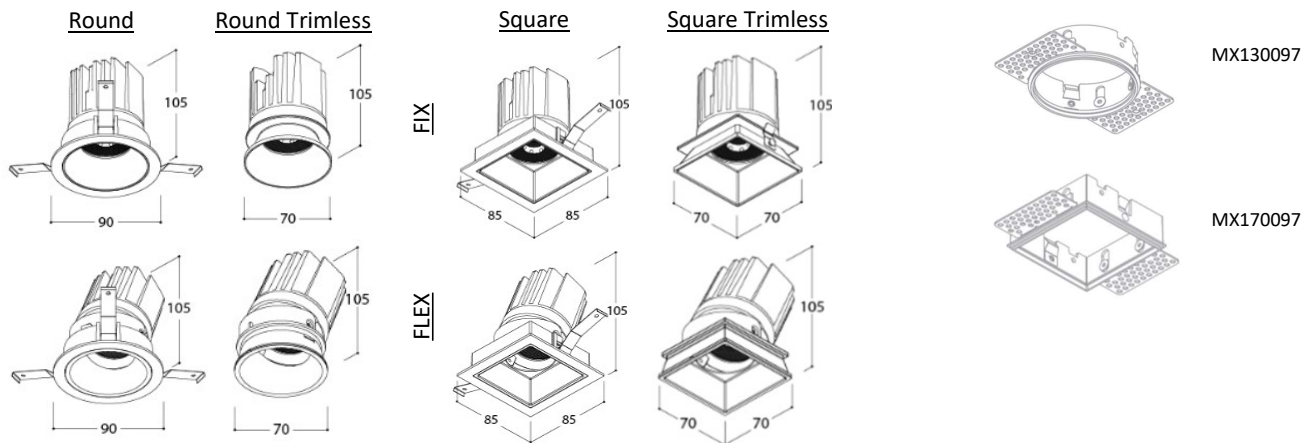

Color Reference Index

