

NAME	MICRO TOMMY 2 CEILING EVO 230V MAINS DIMMABLE		
REFERENCE	ALL REFS SEE TABLE ON VERSO PAGE		
SPECIFICATIONS			
	Lamptype	2x BRIDGELUX	
	Symbol		
	CCT	2700K / 3000K*	
	Luminous flux	2x 476lm / 495lm*	
	Power	2x 4,11W	
	Current	N.A.	
	Voltage	230V 50-60Hz AC	
	CRI	90	
	SDCM	3	
	Beamangle	15° / 36° / 50°	
	Orientability	20° 15°	
	Gear	converter incorporated	
	Dimmability	mains dimmable RC (see dimlist U)	
	Safe distance to object	0,1m	
	Class / IP	IP20	
	Application	interior - ceiling	
	Installation cut out / depth	N.A.	
	Weight	0,7 kg	

1 DRILL PATTERN

2 MOUNT BASE ON CEILING

3 MAKE EARTHING & PRIMARY CONNECTION
MOUNT CORPUS ON ITS BASE WHILE PROTECTING ALL WIRES.

4 SWITCH ON MAINS POWER SUPPLY

MAKE PRIMARY CONNECTION

! ALWAYS DISCONNECT MAINS POWER SUPPLY FROM CONVERTER BEFORE SWITCHING "ON" LED LUMINAIRES TO PREVENT HOT PLUGGING ISSUES

- NL

Installatie- en onderhoudsrichtlijnen m.b.t. de fabrieksgarantie.

1. De plaatsing, de aansluiting en het uittesten van dit toestel dient steeds te gebeuren door een erkend elektro-installateur.

2. Dit toestel moet geïnstalleerd, verbonden en getest worden volgens de nationaal geldende reglementen op elektrische installaties.

3. De technische bijsluiter dient te worden beschouwd als een onderdeel van de algemene verkoopsvoorwaarden van TAL nv.

4. De elektro-installateur is verantwoordelijk voor het gebruik van compatibele voorschakelapparatuur die voldoen aan de geldende IEC normen.

5. Reinig het toestel enkel met een zachte en lichtvochtige doek zonder reinigingsmiddel.

6. Schakel altijd eerst de elektriciteit uit alvorens het toestel te plaatsen en te installeren.
- EN

Installation and maintenance instructions regarding the manufacturer's warranty.

1. Installation, connection and testing of this product must always be performed by a certified electrician.

2. This product must be installed, connected and tested in accordance with the applicable national regulations for electrical installations.

3. The technical manual must be regarded as part of the general sales conditions of TAL nv.

4. The electrical installer is responsible for the use of compatible control gear that meets the applicable IEC standards.

5. Only clean the device with a soft and slightly moist cloth without detergent.

6. Always switch off the electricity supply before installing and connecting the product.
- DE

Installations- und Wartungsanweisungen bezüglich der Herstellergarantie.

1. Installation, Anschluß und Prüfung dieses Geräts soll nur von einem anerkannten Elektriker ausgeführt werden.

2. Dieses Gerät soll in Übereinstimmung mit den nationalen geltenden Vorschriften für Elektroinstallationen installiert, angeschlossen und geprüft werden.

3. Die technische Anleitung muß als Teil der allgemeinen Verkaufsbedingungen von TAL nv betrachtet werden.

4. Der Elektroinstallateur ist verantwortlich für die Verwendung von kompatiblen Betriebsgeräten, die den geltenden IEC-Normen entsprechen.

5. Reinigen Sie das Gerät nur mit einem weichen und leicht feuchten Tuch ohne Reinigungsmittel.

6. Schalten Sie den Strom immer aus, bevor Sie das Gerät installieren und anschließen.
- FR

Instructions d'installation et d'entretien concernant la garantie du fabricant.

1. L'installation, la connexion et les essais de cet appareil doivent toujours être effectués par un électricien reconnu.

2. Cet appareil doit être installé, raccordé et testé conformément aux réglementations nationales pour les installations électriques.

3. La notice technique doit être considérée comme faisant partie des conditions générales de vente de TAL SA.


4. L'installateur électrique est responsable de l'utilisation d'un équipement de contrôle compatible qui satisfait aux normes CEI applicables.

5. Nettoyez l'appareil uniquement avec un chiffon doux et légèrement humide sans détergent.


6. Éteignez toujours l'électricité avant d'installer et de connecter l'appareil.

EXCHANGE ACTIONS TO REPLACE LED-COB


A Mounting led-parts into the lampfitting

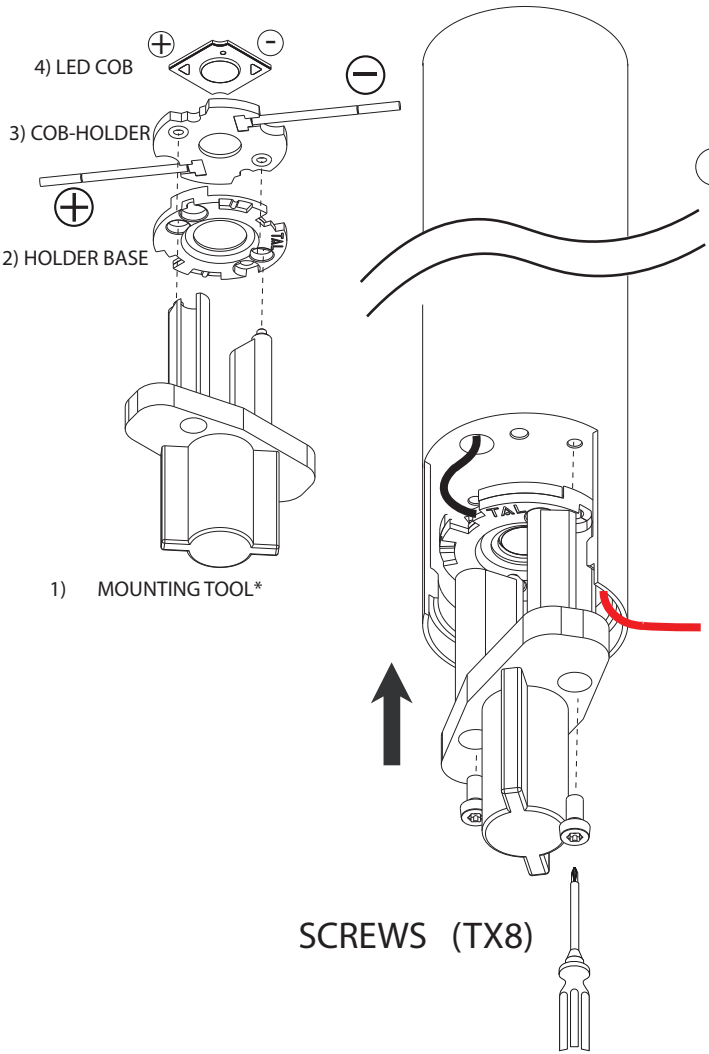


B Placing cables against base

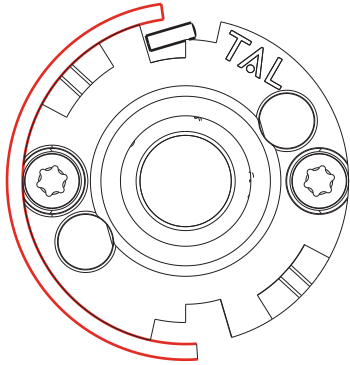

C Mounting lensholder

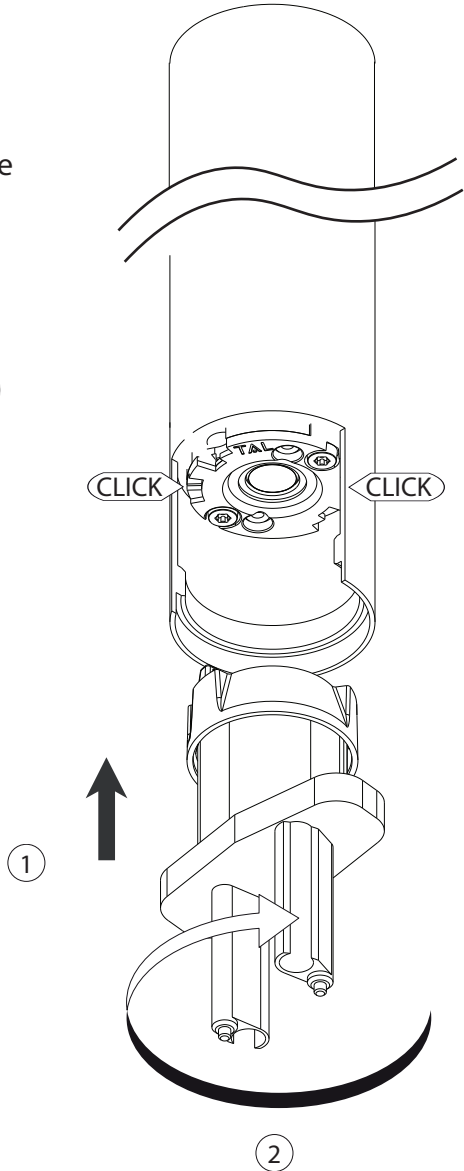

D Placing Lens and turn the focusing in the fitting

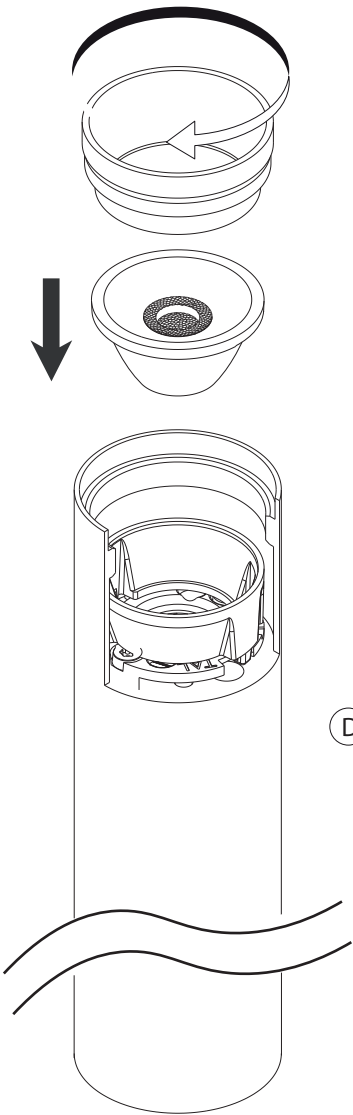

618816N	MICRO TOMMY 2 CEILING 230V EVO 15°	3000K MAINS DIMMABLE	TEXTURED BLACK
618837N	MICRO TOMMY 2 CEILING 230V EVO 15°	3000K MAINS DIMMABLE	TEXTURED WHITE
618882N	MICRO TOMMY 2 CEILING 230V EVO 15°	3000K MAINS DIMMABLE	TEXTURED WHITE + GOLD FOCUS
618884N	MICRO TOMMY 2 CEILING 230V EVO 15°	3000K MAINS DIMMABLE	TEXTURED WHITE + BLACK FOCUS
618885N	MICRO TOMMY 2 CEILING 230V EVO 15°	3000K MAINS DIMMABLE	TEXTURED BLACK + WHITE FOCUS
618886N	MICRO TOMMY 2 CEILING 230V EVO 15°	3000K MAINS DIMMABLE	TEXTURED BLACK + GOLD FOCUS
618887N	MICRO TOMMY 2 CEILING 230V EVO 15°	3000K MAINS DIMMABLE	TEXTURED WHITE + BLACK RINGS + BLACK FOCUS
618892N	MICRO TOMMY 2 CEILING 230V EVO 15°	2700K MAINS DIMMABLE	TEXTURED WHITE + GOLD FOCUS
618894N	MICRO TOMMY 2 CEILING 230V EVO 15°	2700K MAINS DIMMABLE	TEXTURED WHITE + BLACK FOCUS
618895N	MICRO TOMMY 2 CEILING 230V EVO 15°	2700K MAINS DIMMABLE	TEXTURED BLACK + WHITE FOCUS
618896N	MICRO TOMMY 2 CEILING 230V EVO 15°	2700K MAINS DIMMABLE	TEXTURED BLACK + GOLD FOCUS
618897N	MICRO TOMMY 2 CEILING 230V EVO 15°	2700K MAINS DIMMABLE	TEXTURED WHITE + BLACK RINGS + BLACK FOCUS
618847N	MICRO TOMMY 2 CEILING 230V EVO 15°	2700K MAINS DIMMABLE	TEXTURED WHITE
618826N	MICRO TOMMY 2 CEILING 230V EVO 15°	2700K MAINS DIMMABLE	TEXTURED BLACK
618816M	MICRO TOMMY 2 CEILING 230V EVO 36°	3000K MAINS DIMMABLE	TEXTURED BLACK
618837M	MICRO TOMMY 2 CEILING 230V EVO 36°	3000K MAINS DIMMABLE	TEXTURED WHITE
618882M	MICRO TOMMY 2 CEILING 230V EVO 36°	3000K MAINS DIMMABLE	TEXTURED WHITE + GOLD FOCUS
618884M	MICRO TOMMY 2 CEILING 230V EVO 36°	3000K MAINS DIMMABLE	TEXTURED WHITE + BLACK FOCUS
618885M	MICRO TOMMY 2 CEILING 230V EVO 36°	3000K MAINS DIMMABLE	TEXTURED BLACK + WHITE FOCUS
618886M	MICRO TOMMY 2 CEILING 230V EVO 36°	3000K MAINS DIMMABLE	TEXTURED BLACK + GOLD FOCUS
618887M	MICRO TOMMY 2 CEILING 230V EVO 36°	3000K MAINS DIMMABLE	TEXTURED WHITE + BLACK RINGS + BLACK FOCUS
618892M	MICRO TOMMY 2 CEILING 230V EVO 36°	2700K MAINS DIMMABLE	TEXTURED WHITE + GOLD FOCUS
618894M	MICRO TOMMY 2 CEILING 230V EVO 36°	2700K MAINS DIMMABLE	TEXTURED WHITE + BLACK FOCUS
618895M	MICRO TOMMY 2 CEILING 230V EVO 36°	2700K MAINS DIMMABLE	TEXTURED BLACK + WHITE FOCUS
618896M	MICRO TOMMY 2 CEILING 230V EVO 36°	2700K MAINS DIMMABLE	TEXTURED BLACK + GOLD FOCUS
618897M	MICRO TOMMY 2 CEILING 230V EVO 36°	2700K MAINS DIMMABLE	TEXTURED WHITE + BLACK RINGS + BLACK FOCUS
618847M	MICRO TOMMY 2 CEILING 230V EVO 36°	2700K MAINS DIMMABLE	TEXTURED WHITE
618826M	MICRO TOMMY 2 CEILING 230V EVO 36°	2700K MAINS DIMMABLE	TEXTURED BLACK
618816W	MICRO TOMMY 2 CEILING 230V EVO 50°	3000K MAINS DIMMABLE	TEXTURED BLACK
618837W	MICRO TOMMY 2 CEILING 230V EVO 50°	3000K MAINS DIMMABLE	TEXTURED WHITE
618882W	MICRO TOMMY 2 CEILING 230V EVO 50°	3000K MAINS DIMMABLE	TEXTURED WHITE + GOLD FOCUS
618884W	MICRO TOMMY 2 CEILING 230V EVO 50°	3000K MAINS DIMMABLE	TEXTURED WHITE + BLACK FOCUS
618885W	MICRO TOMMY 2 CEILING 230V EVO 50°	3000K MAINS DIMMABLE	TEXTURED BLACK + WHITE FOCUS
618886W	MICRO TOMMY 2 CEILING 230V EVO 50°	3000K MAINS DIMMABLE	TEXTURED BLACK + GOLD FOCUS
618887W	MICRO TOMMY 2 CEILING 230V EVO 50°	3000K MAINS DIMMABLE	TEXTURED WHITE + BLACK RINGS + BLACK FOCUS
618892W	MICRO TOMMY 2 CEILING 230V EVO 50°	2700K MAINS DIMMABLE	TEXTURED WHITE + GOLD FOCUS
618894W	MICRO TOMMY 2 CEILING 230V EVO 50°	2700K MAINS DIMMABLE	TEXTURED WHITE + BLACK FOCUS
618895W	MICRO TOMMY 2 CEILING 230V EVO 50°	2700K MAINS DIMMABLE	TEXTURED BLACK + WHITE FOCUS
618896W	MICRO TOMMY 2 CEILING 230V EVO 50°	2700K MAINS DIMMABLE	TEXTURED BLACK + GOLD FOCUS
618897W	MICRO TOMMY 2 CEILING 230V EVO 50°	2700K MAINS DIMMABLE	TEXTURED WHITE + BLACK RINGS + BLACK FOCUS
618847W	MICRO TOMMY 2 CEILING 230V EVO 50°	2700K MAINS DIMMABLE	TEXTURED WHITE
618826W	MICRO TOMMY 2 CEILING 230V EVO 50°	2700K MAINS DIMMABLE	TEXTURED BLACK