

Installation en onderhoudsrichtlijnen m.b.t. de fabrieksgarantie.

1. De plaatsing, de aansluiting en het uitschakelen van het toestel dient steeds te gebeuren door een erkend elektro-installateur.
2. Dit toestel moet geïnstalleerd, verbonden en getest worden volgens de nationaal geldende reglementen op elektrische installaties.
3. De technische bijsluiter dient te worden beschouwd als een onderdeel van de algemene verkoopvoorwaarden van TAL nv.
4. De elektro-installateur is verantwoordelijk voor het gebruik van compatibele voorschakelapparatuur die voldoen aan de geldende IEC normen.
5. Reinig het toestel enkel met een zachte en lichtvochtige doek zonder reinigingsmiddel.
6. Schakel altijd eerst de elektriciteit uit alvorens het toestel te plaatsen en te installeren.

EN Installation and maintenance instructions regarding the manufacturer's warranty.

1. Installation, connection and testing of this product must always be performed by a certified electrician.
2. This product must be installed, connected and tested in accordance with the applicable national regulations for electrical installations.
3. The technical manual must be regarded as part of the general sales conditions of TAL nv.
4. The electrical installer is responsible for the use of compatible control gear that meets the applicable IEC standards.
5. Only clean the device with a soft and slightly moist cloth without detergent.
6. Always switch off the electricity supply before installing and connecting the product.


DE Installations- und Wartungsanweisungen bezüglich der Herstellergarantie.

1. Installation, Anschluß und Prüfung dieses Geräts soll nur von einem anerkannten Elektriker ausgeführt werden.
2. Dieses Gerät soll in Übereinstimmung mit den nationalen geltenden Vorschriften für Elektroinstallationen installiert, angeschlossen und geprüft werden.
3. Die technische Anleitung muß als Teil der allgemeinen Verkaufsbedingungen von TAL nv betrachtet werden.
4. Der Elektroinstallateur ist verantwortlich für die Verwendung von kompatiblen Betriebsgeräten, die den geltenden IEC-Normen entsprechen.
5. Reinigen Sie das Gerät nur mit einem weichen und leicht feuchten Tuch ohne Reinigungsmittel.
6. Schalten Sie den Strom immer aus, bevor Sie das Gerät installieren und anschließen.

FR Instructions d'installation et d'entretien concernant la garantie du fabricant.

1. L'installation, la connexion et les essais de cet appareil doivent toujours être effectués par un électricien reconnu.
2. Cet appareil doit être installé, raccordé et testé conformément aux réglementations nationales pour les installations électriques.
3. La notice technique doit être considérée comme faisant partie des conditions générales de vente de TAL SA.
4. L'installateur électrique est responsable de l'utilisation d'un équipement de contrôle compatible qui satisfait aux normes CEI applicables.
5. Nettoyez l'appareil uniquement avec un chiffon doux et légèrement humide sans détergent.
6. Éteignez toujours l'électricité avant d'installer et de connecter l'appareil.

① DRILL PATTERN



② MOUNT BASE ON CEILING


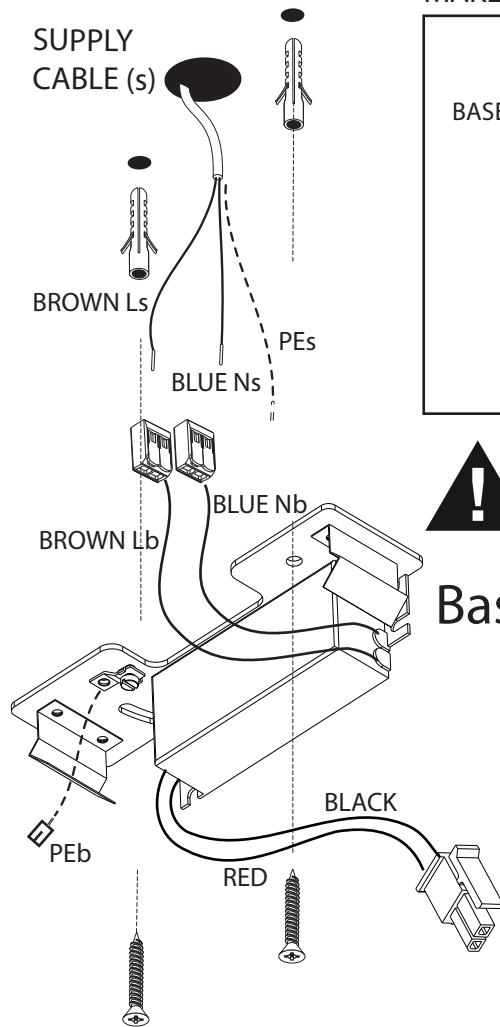



Diagram illustrating the connection of a 230V supply cable (s) to a base (b) and a corpus (c). The base (b) has two terminals: BROWN Lb and BLUE Nb. The corpus (c) has two terminals: BROWN Ls and BLUE Ns. A dashed line connects the BLUE Nb terminal to the BLUE Ns terminal, passing through a ground symbol labeled PEb and PEc. The ground symbol is labeled CORPUS (c).

 ALWAYS DISCONNECT MAINS POWER SUPPLY FROM CONVERTER BEFORE SWITCHING “ON” LED LUMINAIRES TO PREVENT HOT PLUGGING ISSUES




Base

Base

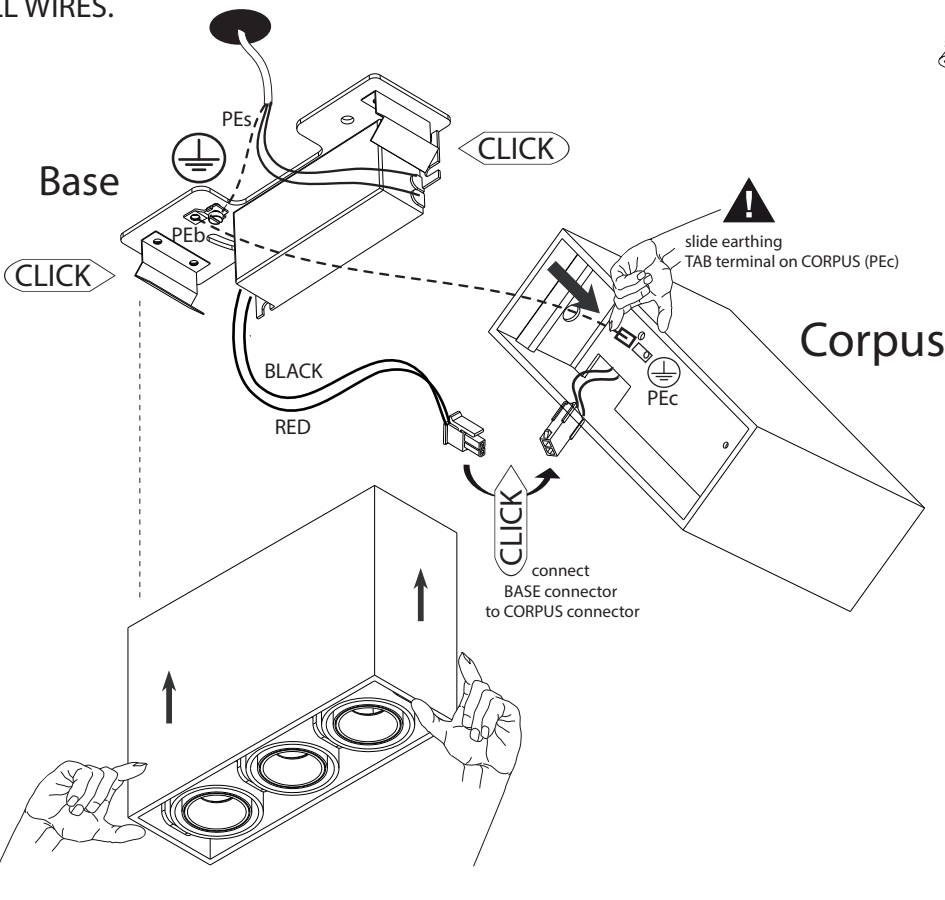

④ SWITCH ON MAINS POWER SUPPLY

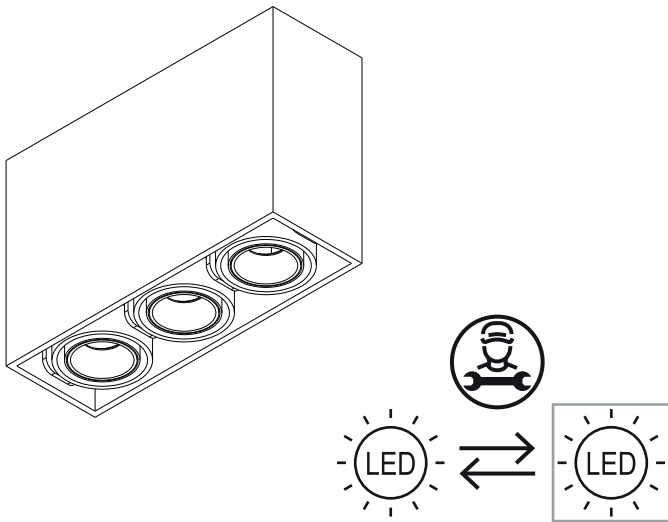


Replaceable (LED only) light source
by a professional


! ALWAYS DISCONNECT MAINS POWER SUPPLY FROM CONVERTER BEFORE SWITCHING "ON" LED LUMINAIRES TO PREVENT HOT PLUGGING ISSUES!

EXCHANGE ACTIONS TO REPLACE LED-COB


A Mounting led-parts into the lampfitting

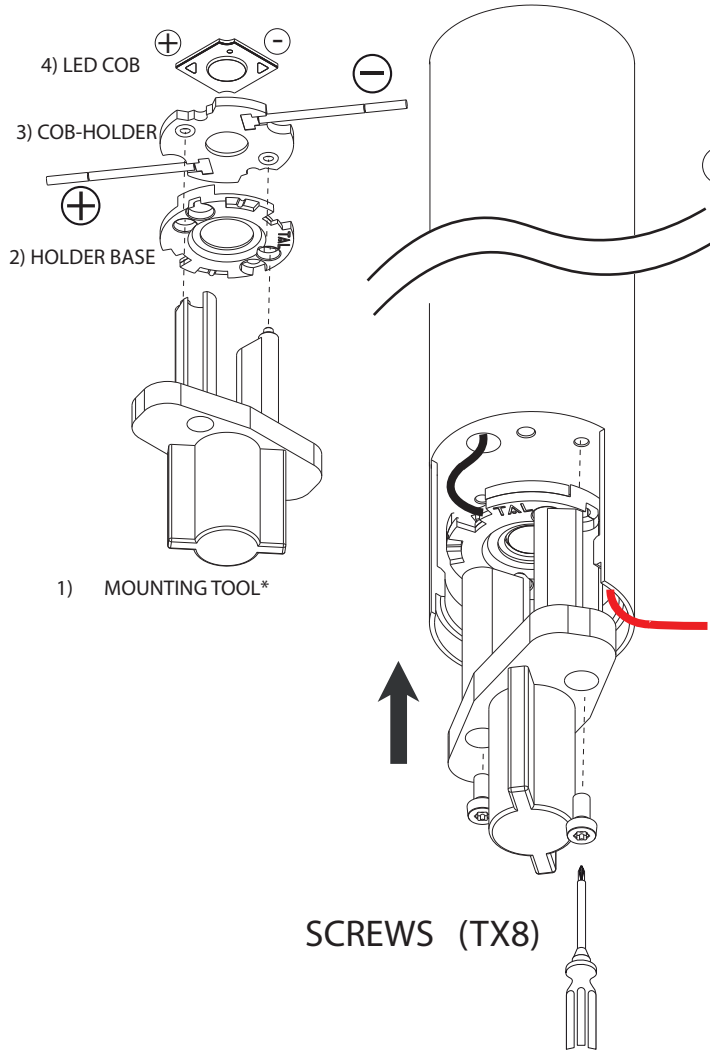


B Placing cables against base

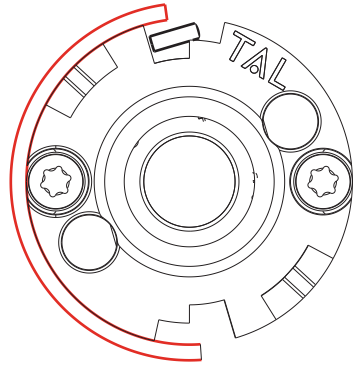

C Mounting lensholder

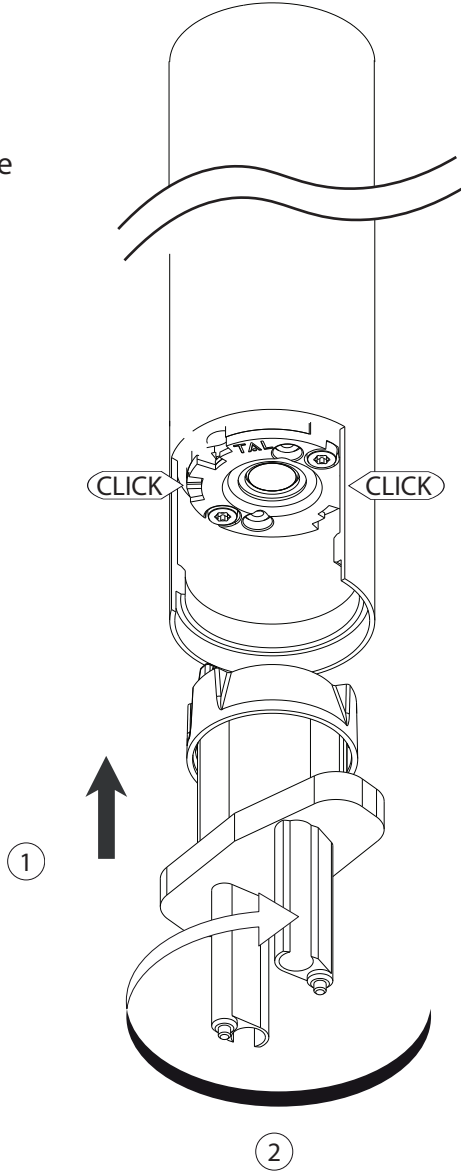

D Placing Lens and turn the focusing in the fitting

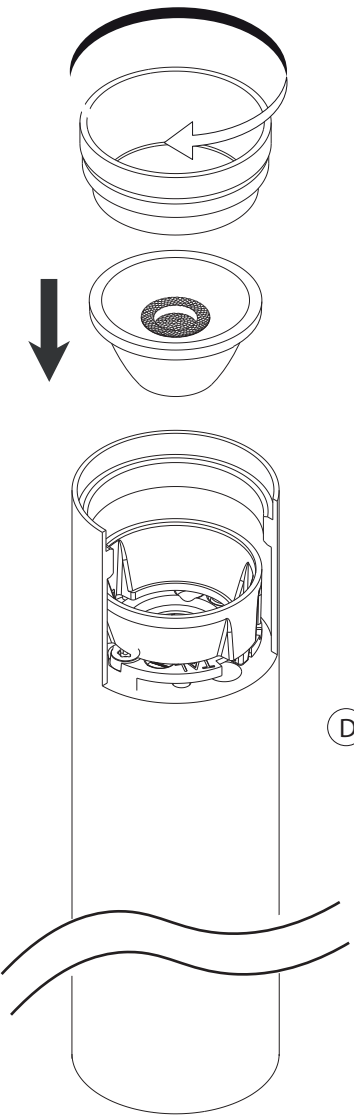

618716N MICRO TOMMY 3 CEILING 230V EVO 15° 3000K MAINS DIMMABLE
618784N MICRO TOMMY 3 CEILING 230V EVO 15° 3000K MAINS DIMMABLE
618785N MICRO TOMMY 3 CEILING 230V EVO 15° 3000K MAINS DIMMABLE
618786N MICRO TOMMY 3 CEILING 230V EVO 15° 3000K MAINS DIMMABLE
618787N MICRO TOMMY 3 CEILING 230V EVO 15° 3000K MAINS DIMMABLE
618737N MICRO TOMMY 3 CEILING 230V EVO 15° 3000K MAINS DIMMABLE
618782N MICRO TOMMY 3 CEILING 230V EVO 15° 3000K MAINS DIMMABLE
618726N MICRO TOMMY 3 CEILING 230V EVO 15° 2700K MAINS DIMMABLE
618747N MICRO TOMMY 3 CEILING 230V EVO 15° 2700K MAINS DIMMABLE
618792N MICRO TOMMY 3 CEILING 230V EVO 15° 2700K MAINS DIMMABLE
618794N MICRO TOMMY 3 CEILING 230V EVO 15° 2700K MAINS DIMMABLE
618795N MICRO TOMMY 3 CEILING 230V EVO 15° 2700K MAINS DIMMABLE
618796N MICRO TOMMY 3 CEILING 230V EVO 15° 2700K MAINS DIMMABLE
618797N MICRO TOMMY 3 CEILING 230V EVO 15° 2700K MAINS DIMMABLE

TEXTURED BLACK
TEXTURED WHITE + BLACK FOCUS
TEXTURED BLACK + WHITE FOCUS
TEXTURED BLACK + GOLD FOCUS
TEXTURED WHITE + BLACK RINGS + BLACK FOCUS
TEXTURED WHITE
TEXTURED WHITE + GOLD FOCUS
TEXTURED BLACK
TEXTURED WHITE
TEXTURED WHITE + GOLD FOCUS
TEXTURED WHITE + BLACK FOCUS
TEXTURED BLACK + WHITE FOCUS
TEXTURED BLACK + GOLD FOCUS
TEXTURED WHITE + BLACK RINGS + BLACK FOCUS

618716M MICRO TOMMY 3 CEILING 230V EVO 36° 3000K MAINS DIMMABLE
618784M MICRO TOMMY 3 CEILING 230V EVO 36° 3000K MAINS DIMMABLE
618785M MICRO TOMMY 3 CEILING 230V EVO 36° 3000K MAINS DIMMABLE
618786M MICRO TOMMY 3 CEILING 230V EVO 36° 3000K MAINS DIMMABLE
618787M MICRO TOMMY 3 CEILING 230V EVO 36° 3000K MAINS DIMMABLE
618737M MICRO TOMMY 3 CEILING 230V EVO 36° 3000K MAINS DIMMABLE
618782M MICRO TOMMY 3 CEILING 230V EVO 36° 3000K MAINS DIMMABLE
618726M MICRO TOMMY 3 CEILING 230V EVO 36° 2700K MAINS DIMMABLE
618747M MICRO TOMMY 3 CEILING 230V EVO 36° 2700K MAINS DIMMABLE
618792M MICRO TOMMY 3 CEILING 230V EVO 36° 2700K MAINS DIMMABLE
618794M MICRO TOMMY 3 CEILING 230V EVO 36° 2700K MAINS DIMMABLE
618795M MICRO TOMMY 3 CEILING 230V EVO 36° 2700K MAINS DIMMABLE
618796M MICRO TOMMY 3 CEILING 230V EVO 36° 2700K MAINS DIMMABLE
618797M MICRO TOMMY 3 CEILING 230V EVO 36° 2700K MAINS DIMMABLE

TEXTURED BLACK
TEXTURED WHITE + BLACK FOCUS
TEXTURED BLACK + WHITE FOCUS
TEXTURED BLACK + GOLD FOCUS
TEXTURED WHITE + BLACK RINGS + BLACK FOCUS
TEXTURED WHITE
TEXTURED WHITE + GOLD FOCUS
TEXTURED BLACK
TEXTURED WHITE
TEXTURED WHITE + GOLD FOCUS
TEXTURED WHITE + BLACK FOCUS
TEXTURED BLACK + WHITE FOCUS
TEXTURED BLACK + GOLD FOCUS
TEXTURED WHITE + BLACK RINGS + BLACK FOCUS

618716W MICRO TOMMY 3 CEILING 230V EVO 50° 3000K MAINS DIMMABLE
618784W MICRO TOMMY 3 CEILING 230V EVO 50° 3000K MAINS DIMMABLE
618785W MICRO TOMMY 3 CEILING 230V EVO 50° 3000K MAINS DIMMABLE
618786W MICRO TOMMY 3 CEILING 230V EVO 50° 3000K MAINS DIMMABLE
618787W MICRO TOMMY 3 CEILING 230V EVO 50° 3000K MAINS DIMMABLE
618737W MICRO TOMMY 3 CEILING 230V EVO 50° 3000K MAINS DIMMABLE
618782W MICRO TOMMY 3 CEILING 230V EVO 50° 3000K MAINS DIMMABLE
618726W MICRO TOMMY 3 CEILING 230V EVO 50° 2700K MAINS DIMMABLE
618747W MICRO TOMMY 3 CEILING 230V EVO 50° 2700K MAINS DIMMABLE
618792W MICRO TOMMY 3 CEILING 230V EVO 50° 2700K MAINS DIMMABLE
618794W MICRO TOMMY 3 CEILING 230V EVO 50° 2700K MAINS DIMMABLE
618795W MICRO TOMMY 3 CEILING 230V EVO 50° 2700K MAINS DIMMABLE
618796W MICRO TOMMY 3 CEILING 230V EVO 50° 2700K MAINS DIMMABLE
618797W MICRO TOMMY 3 CEILING 230V EVO 50° 2700K MAINS DIMMABLE

TEXTURED BLACK
TEXTURED WHITE + BLACK FOCUS
TEXTURED BLACK + WHITE FOCUS
TEXTURED BLACK + GOLD FOCUS
TEXTURED WHITE + BLACK RINGS + BLACK FOCUS
TEXTURED WHITE
TEXTURED WHITE + GOLD FOCUS
TEXTURED BLACK
TEXTURED WHITE
TEXTURED WHITE + GOLD FOCUS
TEXTURED WHITE + BLACK FOCUS
TEXTURED BLACK + WHITE FOCUS
TEXTURED BLACK + GOLD FOCUS
TEXTURED WHITE + BLACK RINGS + BLACK FOCUS