


name	NOBEL PI EVO M10 350mA										
ref	ALL REFS SEE TABLE ON VERSO PAGE 										
A											
safe distance to object	 - 0,1m - 										
lamptype	BRIDGELUX (476lm/495lm**)										
fitting	NONE										
watt	4,11W										
voltage	350 mA - DC										
symbol											
gear	converter not incorporated										
ip/class	IP20										
application	Interior - ceiling mounted										
orientability	not orientable										
dimmability	CCR/PWM dimmable										
weight	 0,6										
color temp	2700K OR 3000K **										
CRI / SDCM	90 / 3										
ACCESSORIES	<table><tr><td>B</td><td>408826 M10 BASE RECESSED SMALL RECESSED TEXT BLACK 408847 M10 BASE RECESSED SMALL RECESSEDTEXT WHITE 408834 M10 BASE RECESSED SMALL RECESSED TEXT RED 408820 M10 BASE RECESSED SMALL RECESSED CHROME</td></tr><tr><td>C</td><td>408926 M10 BASE RECESSED LARGE RECESSED TEXT BLACK 408947 M10 BASE RECESSED LARGE RECESSED TEXT WHITE 408934 M10 BASE RECESSED LARGE RECESSED TEXT RED 408920 M10 BASE RECESSED LARGE RECESSED CHROME</td></tr><tr><td>D</td><td>408726 M10 BASE III CI LARGE 350mA TEXT BLACK 408747 M10 BASE III CI LARGE 350mA TEXT WHITE</td></tr><tr><td>E</td><td>408626 KOSMOS BASE TEXT BLACK 408634 KOSMOS BASE TEXT RED 408647 KOSMOS BASE TEXT WHITE</td></tr></table>			B	408826 M10 BASE RECESSED SMALL RECESSED TEXT BLACK 408847 M10 BASE RECESSED SMALL RECESSEDTEXT WHITE 408834 M10 BASE RECESSED SMALL RECESSED TEXT RED 408820 M10 BASE RECESSED SMALL RECESSED CHROME	C	408926 M10 BASE RECESSED LARGE RECESSED TEXT BLACK 408947 M10 BASE RECESSED LARGE RECESSED TEXT WHITE 408934 M10 BASE RECESSED LARGE RECESSED TEXT RED 408920 M10 BASE RECESSED LARGE RECESSED CHROME	D	408726 M10 BASE III CI LARGE 350mA TEXT BLACK 408747 M10 BASE III CI LARGE 350mA TEXT WHITE	E	408626 KOSMOS BASE TEXT BLACK 408634 KOSMOS BASE TEXT RED 408647 KOSMOS BASE TEXT WHITE
B	408826 M10 BASE RECESSED SMALL RECESSED TEXT BLACK 408847 M10 BASE RECESSED SMALL RECESSEDTEXT WHITE 408834 M10 BASE RECESSED SMALL RECESSED TEXT RED 408820 M10 BASE RECESSED SMALL RECESSED CHROME										
C	408926 M10 BASE RECESSED LARGE RECESSED TEXT BLACK 408947 M10 BASE RECESSED LARGE RECESSED TEXT WHITE 408934 M10 BASE RECESSED LARGE RECESSED TEXT RED 408920 M10 BASE RECESSED LARGE RECESSED CHROME										
D	408726 M10 BASE III CI LARGE 350mA TEXT BLACK 408747 M10 BASE III CI LARGE 350mA TEXT WHITE										
E	408626 KOSMOS BASE TEXT BLACK 408634 KOSMOS BASE TEXT RED 408647 KOSMOS BASE TEXT WHITE										

NL

Installatie- en onderhoudsrichtlijnen m.b.t. de fabrieksgarantie.
1. De plaatsing, de aansluiting en het uittesten van dit toestel dient steeds te gebeuren door een erkend elektro-installateur.
2. Dit toestel moet geïnstalleerd, verbonden en getest worden volgens de nationaal geldende reglementen op elektrische installaties.
3. De technische bijsluiter dient te worden beschouwd als een onderdeel van de algemene verkoopvoorwaarden van TAL nv.
4. De elektro-installateur is verantwoordelijk voor het gebruik van compatibele voorschakelapparatuur die voldoen aan de geldende IEC normen.
5. Reinig het toestel enkel met een zachte en lichtvochtige doek zonder reinigingsmiddel.
6. Schakel altijd eerst de elektriciteit uit alvorens het toestel te plaatsen en te installeren.

EN

Installation and maintenance instructions regarding the manufacturer's warranty.
1. Installation, connection and testing of this product must always be performed by a certified electrician.
2. This product must be installed, connected and tested in accordance with the applicable national regulations for electrical installations.
3. The technical manual must be regarded as part of the general sales conditions of TAL nv.
4. The electrical installer is responsible for the use of compatible control gear that meets the applicable IEC standards.
5. Only clean the device with a soft and slightly moist cloth without detergent.
6. Always switch off the electricity supply before installing and connecting the product.

DE


Installations- und Wartungsanweisungen bezüglich der Herstellergarantie.
1. Installation, Anschluß und Prüfung dieses Geräts soll nur von einem anerkannten Elektriker ausgeführt werden.
2. Dieses Gerät soll in Übereinstimmung mit den nationalen geltenden Vorschriften für Elektroinstallationen installiert, angeschlossen und geprüft werden.
3. Die technische Anleitung muß als Teil der allgemeinen Verkaufsbedingungen von TAL nv betrachtet werden.
4. Der Elektroinstallateur ist verantwortlich für die Verwendung von kompatiblen Betriebsgeräten, die den geltenden IEC-Normen entsprechen.
5. Reinigen Sie das Gerät nur mit einem weichen und leicht feuchten Tuch ohne Reinigungsmittel.
6. Schalten Sie den Strom immer aus, bevor Sie das Gerät installieren und anschließen.

FR


Instructions d'installation et d'entretien concernant la garantie du fabricant.
1. L'installation, la connexion et les essais de cet appareil doivent toujours être effectués par un électricien reconnu.
2. Cet appareil doit être installé, raccordé et testé conformément aux réglementations nationales pour les installations électriques.
3. La notice technique doit être considérée comme faisant partie des conditions générales de vente de TAL SA.
4. L'installateur électrique est responsable de l'utilisation d'un équipement de contrôle compatible qui satisfait aux normes CEI applicables.
5. Nettoyez l'appareil uniquement avec un chiffon doux et légèrement humide sans détergent.
6. Éteignez toujours l'électricité avant d'installer et de connecter l'appareil.

A. Without any BASE and ceiling (plasterboard, metal,...) accessible from above:

- 1
- Drill 1x hole dia 6.5mm
Installation depth: 20mm

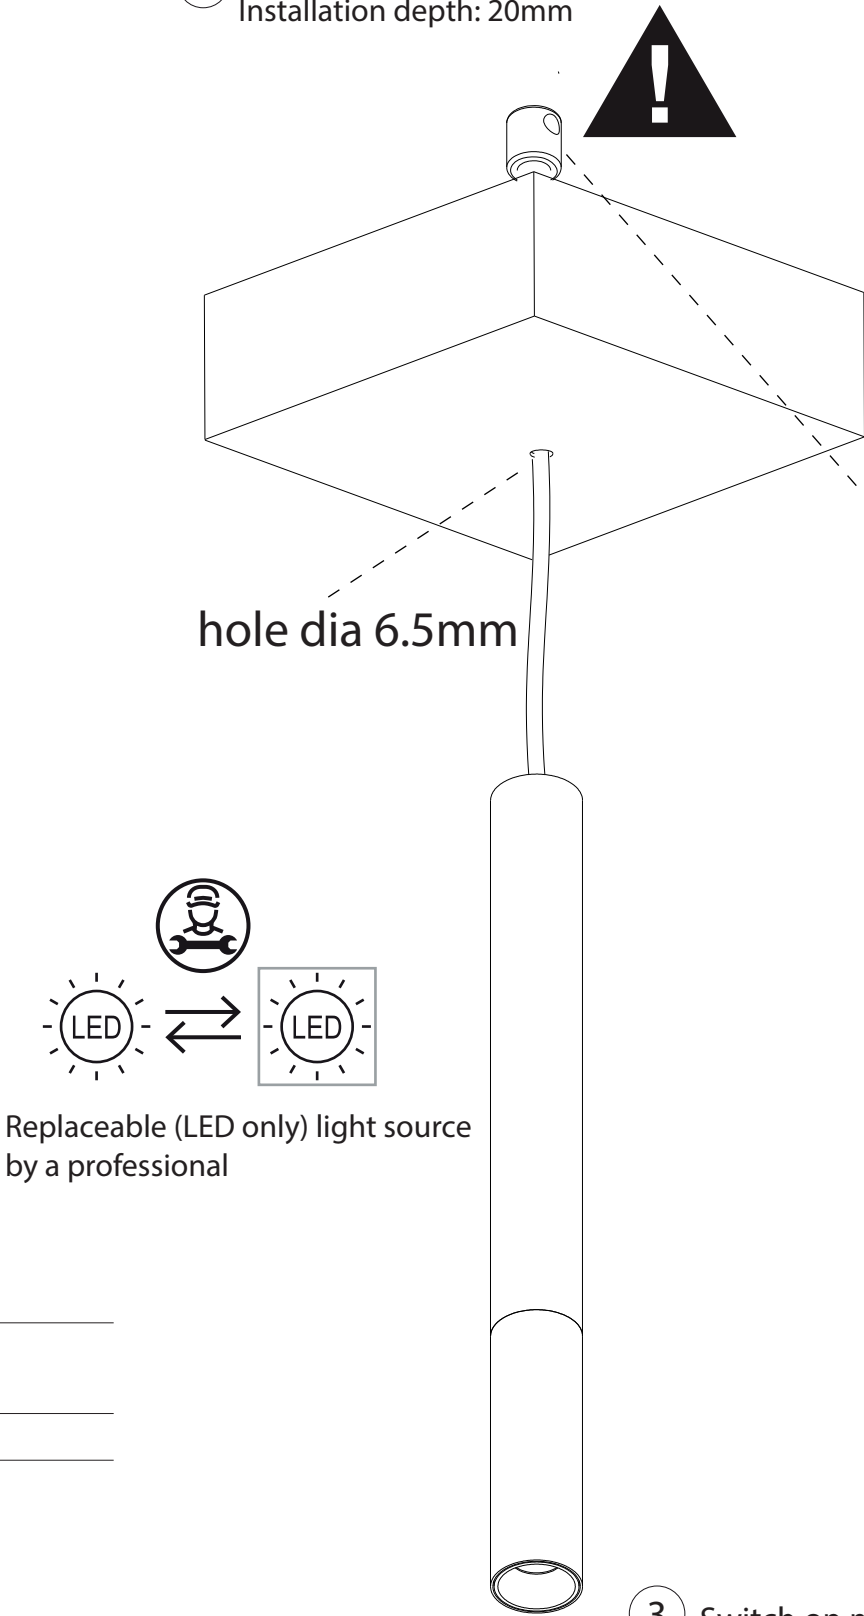

- 2
- Adjust cable length & make mechanical & electrical connection:

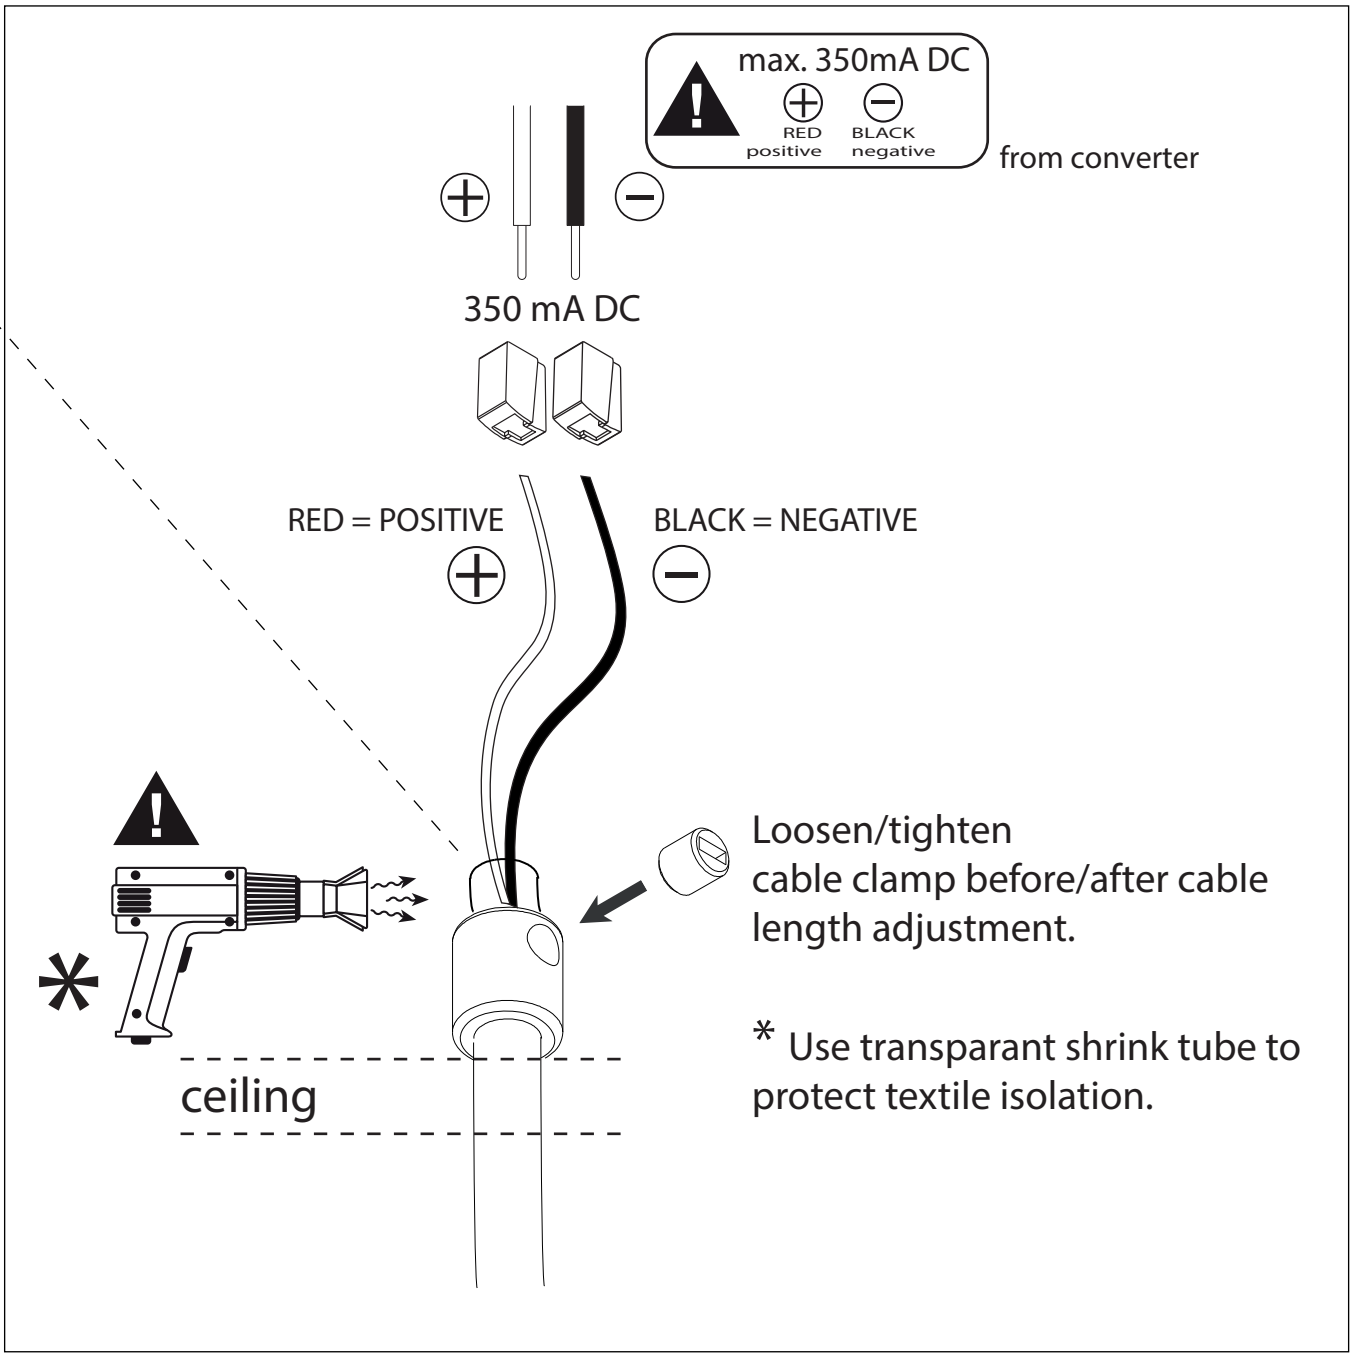

- 3
- Switch on mains power supply Always disconnect the mains of the converter before plugging or unplugging the LEDs !

B. With M10 BASE RECESSED SMALL RECESSED and electrical connection above ceiling

Drill 1x hole dia 20mm
Installation depth: 50mm

C. With M10 BASE RECESSED LARGE RECESSED and electrical connection above ceiling

Drill 1x hole dia 42mm
Installation depth: 50mm


D. With M10 BASE III CI LARGE 350mA for surface mounting on ceiling

E. With KOSMOS BASE (=RECESSED) and electrical connection above ceiling (dia 55, H60mm)


SEE SEPARATE MANUALS (B,C,D & E)

EXCHANGE ACTIONS TO REPLACE LED-COB


A Mounting led-parts into the lampfitting

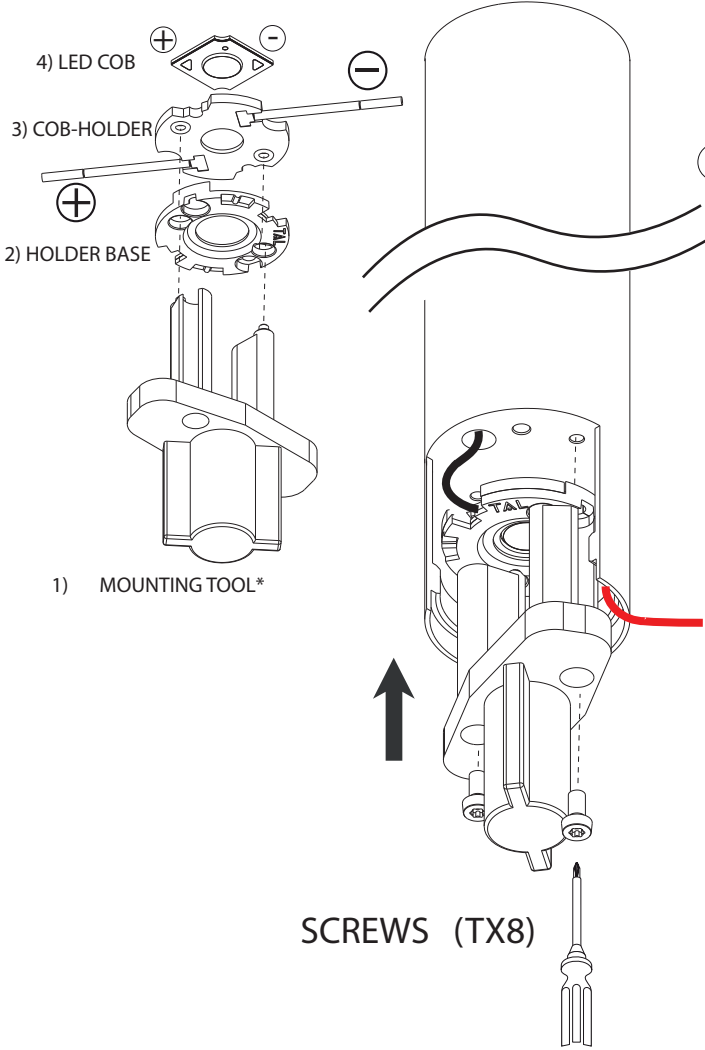


B Placing cables against base

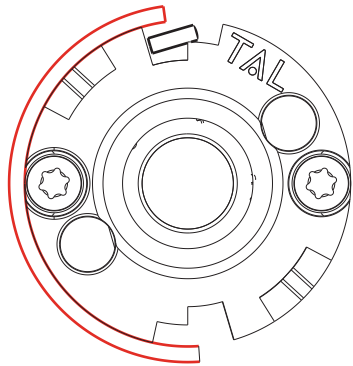

C Mounting lensholder

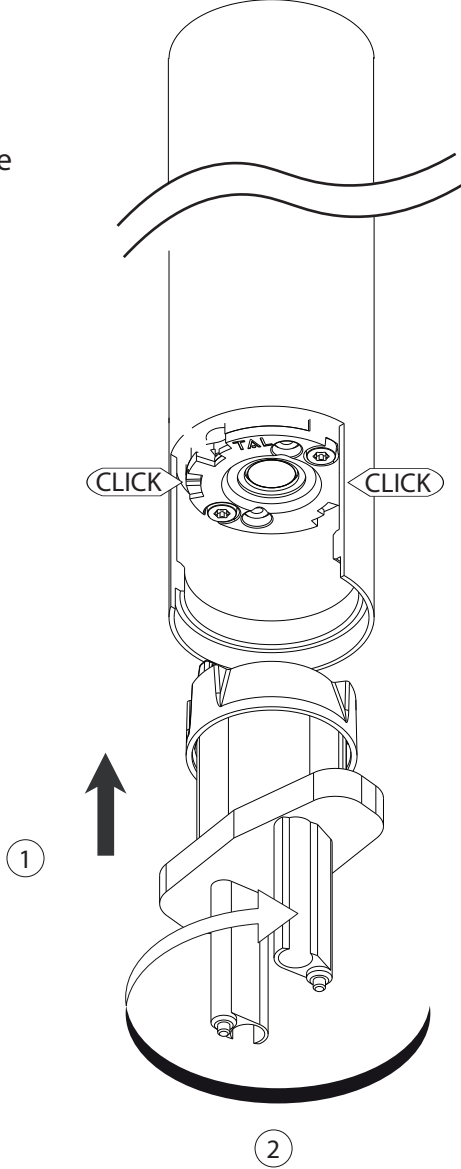

D Placing Lens and turn the focusing in the fitting

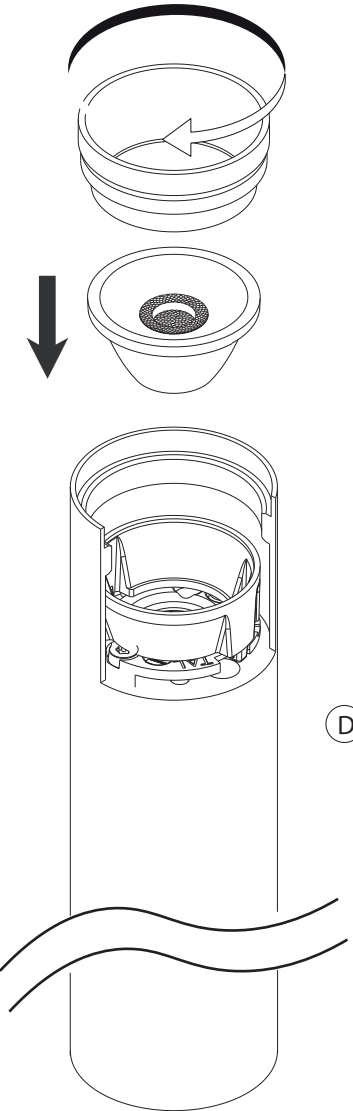

618294N NOBEL PI EVO 15° M10 350mA 2700K
618296N NOBEL PI EVO 15° M10 350mA 2700K
618256N NOBEL PI EVO 15° M10 350mA 2700K
618257N NOBEL PI EVO 15° M10 350mA 2700K
618218N NOBEL PI EVO 15° M10 350mA 2700K
618219N NOBEL PI EVO 15° M10 350mA 2700K
618220N NOBEL PI EVO 15° M10 350mA 2700K
618202N NOBEL PI EVO 15° M10 350mA 2700K
618243N NOBEL PI EVO 15° M10 350mA 2700K
618244N NOBEL PI EVO 15° M10 350mA 2700K
618245N NOBEL PI EVO 15° M10 350mA 2700K

TEXTURED WHITE + TEXTURED BLACK FOCUS
BLACK+GOLD
CU29 + TEXTURED BLACK FOCUS
TEXTURED BLACK + CU29
TEXTURED WHITE
TEXTURED BLACK + CHROME
CHROME
TEXTURED BLACK
BRUSHED GOLD ANO
BRUSHED TITANIUM ANO
BRUSHED BRONZE ANO

618208N NOBEL PI EVO 15° M10 350mA 3000K
618209N NOBEL PI EVO 15° M10 350mA 3000K
618210N NOBEL PI EVO 15° M10 350mA 3000K
618212N NOBEL PI EVO 15° M10 350mA 3000K
618246N NOBEL PI EVO 15° M10 350mA 3000K
618247N NOBEL PI EVO 15° M10 350mA 3000K
618284N NOBEL PI EVO 15° M10 350mA 3000K
618286N NOBEL PI EVO 15° M10 350mA 3000K
618253N NOBEL PI EVO 15° M10 350mA 3000K
618254N NOBEL PI EVO 15° M10 350mA 3000K
618255N NOBEL PI EVO 15° M10 350mA 3000K

TEXTURED WHITE
TEXTURED BLACK + CHROME
CHROME
TEXTURED BLACK
CU29 + TEXTURED BLACK FOCUS
TEXTURED BLACK + CU29
TEXTURED WHITE + TEXTURED BLACK FOCUS
BLACK + GOLD
BRUSHED GOLD ANO
BRUSHED TITANIUM ANO
BRUSHED BRONZE ANO

618294M NOBEL PI EVO 36° M10 350mA 2700K
618296M NOBEL PI EVO 36° M10 350mA 2700K
618256M NOBEL PI EVO 36° M10 350mA 2700K
618257M NOBEL PI EVO 36° M10 350mA 2700K
618218M NOBEL PI EVO 36° M10 350mA 2700K
618219M NOBEL PI EVO 36° M10 350mA 2700K
618220M NOBEL PI EVO 36° M10 350mA 2700K
618202M NOBEL PI EVO 36° M10 350mA 2700K
618243M NOBEL PI EVO 36° M10 350mA 2700K
618244M NOBEL PI EVO 36° M10 350mA 2700K
618245M NOBEL PI EVO 36° M10 350mA 2700K

TEXTURED WHITE + TEXTURED BLACK FOCUS
BLACK+GOLD
CU29 + TEXTURED BLACK FOCUS
TEXTURED BLACK + CU29
TEXTURED WHITE
TEXTURED BLACK + CHROME
CHROME
TEXTURED BLACK
BRUSHED GOLD ANO
BRUSHED TITANIUM ANO
BRUSHED BRONZE ANO

618208M NOBEL PI EVO 36° M10 350mA 3000K
618209M NOBEL PI EVO 36° M10 350mA 3000K
618210M NOBEL PI EVO 36° M10 350mA 3000K
618212M NOBEL PI EVO 36° M10 350mA 3000K
618246M NOBEL PI EVO 36° M10 350mA 3000K
618247M NOBEL PI EVO 36° M10 350mA 3000K
618284M NOBEL PI EVO 36° M10 350mA 3000K
618286M NOBEL PI EVO 36° M10 350mA 3000K
618253M NOBEL PI EVO 36° M10 350mA 3000K
618254M NOBEL PI EVO 36° M10 350mA 3000K
618255M NOBEL PI EVO 36° M10 350mA 3000K

TEXTURED WHITE
TEXTURED BLACK + CHROME
CHROME
TEXTURED BLACK
CU29 + TEXTURED BLACK FOCUS
TEXTURED BLACK + CU29
TEXTURED WHITE + TEXTURED BLACK FOCUS
BLACK + GOLD
BRUSHED GOLD ANO
BRUSHED TITANIUM ANO
BRUSHED BRONZE ANO

618294W NOBEL PI EVO 50° M10 350mA 2700K
618296W NOBEL PI EVO 50° M10 350mA 2700K
618256W NOBEL PI EVO 50° M10 350mA 2700K
618257W NOBEL PI EVO 50° M10 350mA 2700K
618218W NOBEL PI EVO 50° M10 350mA 2700K
618219W NOBEL PI EVO 50° M10 350mA 2700K
618220W NOBEL PI EVO 50° M10 350mA 2700K
618202W NOBEL PI EVO 50° M10 350mA 2700K
618243W NOBEL PI EVO 50° M10 350mA 2700K
618244W NOBEL PI EVO 50° M10 350mA 2700K
618245W NOBEL PI EVO 50° M10 350mA 2700K

TEXTURED WHITE + TEXTURED BLACK FOCUS
BLACK+GOLD
CU29 + TEXTURED BLACK FOCUS
TEXTURED BLACK + CU29
TEXTURED WHITE
TEXTURED BLACK + CHROME
CHROME
TEXTURED BLACK
BRUSHED GOLD ANO
BRUSHED TITANIUM ANO
BRUSHED BRONZE ANO

618208W NOBEL PI EVO 50° M10 350mA 3000K
618209W NOBEL PI EVO 50° M10 350mA 3000K
618210W NOBEL PI EVO 50° M10 350mA 3000K
618212W NOBEL PI EVO 50° M10 350mA 3000K
618246W NOBEL PI EVO 50° M10 350mA 3000K
618247W NOBEL PI EVO 50° M10 350mA 3000K
618284W NOBEL PI EVO 50° M10 350mA 3000K
618286W NOBEL PI EVO 50° M10 350mA 3000K
618253W NOBEL PI EVO 50° M10 350mA 3000K
618254W NOBEL PI EVO 50° M10 350mA 3000K
618255W NOBEL PI EVO 50° M10 350mA 3000K

TEXTURED WHITE
TEXTURED BLACK + CHROME
CHROME
TEXTURED BLACK
CU29 + TEXTURED BLACK FOCUS
TEXTURED BLACK + CU29
TEXTURED WHITE + TEXTURED BLACK FOCUS
BLACK + GOLD
BRUSHED GOLD ANO
BRUSHED TITANIUM ANO
BRUSHED BRONZE ANO