



Mix 26W

(See www.mixconfigurator.be)

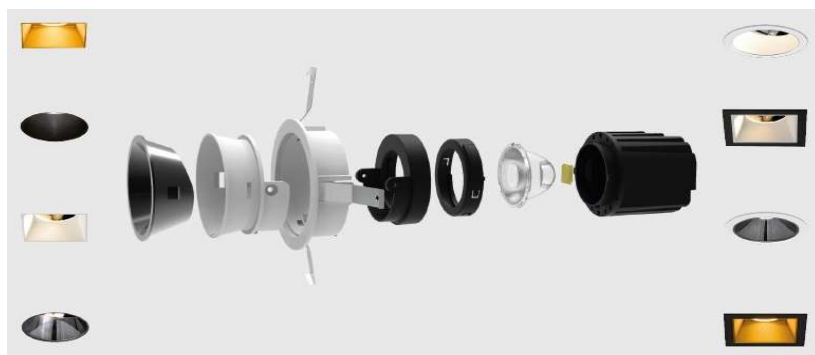

-  100 mm
-  100x100 mm
-  30°
(only FLEX)
-  359°
(only ROUND FLEX)



Luminaire specifications

Material	Aluminium housing PC ABS Focus
IP rating	IP 20
Use	Indoor-Ceiling recessed
Cut-out	Ø100mm/100x100mm
installation depth	140 mm
Weight	500gr

Light source

Type	Citizen			
Power max	24,5 W			
CRI	90			
Color Temperature	2700K	3000K	4000K	1800-3000K
LED output	3190 lm	3318 lm	3368 lm	NA
LUMINAIRE output	2616 lm	2721 lm	2762 lm	NA
LUMEN per Watt	130	135	137	NA

Electrical

Driver	Remote
Dimmable	PWM/CCR
Connection	700mA DC serial
Voltage Forward (VF)	35,1V

Optics


UGR	Not applicable
Material	PMMA
Beam angle	15° - 36° - 50°
Vertical Adjustable	30° (only FLEX)
Horizontal Adjustable	359° (only Round FLEX)

Features

- * Energy saving - high luminaire output
- * LED lifespan 50.000 hours @L80B10
- * SDCM = 3
- * 5 years warranty
- * Modular concept:
all components (LED, lens, focus, frontring)
are interchangeable

Accessories

Frame	Frame for plastered slabs Frame for Plaster
Box	Frame + box for plastered concrete
Honeycomb	Opal Disc
MX200090	MX200091



Article number Definition:

PREFIX	DIGIT1	DIGIT2	DIGIT3	DIGIT4	DIGIT5
Type	Model	Beam angle	Colour temp LED	Focus Colour	Front Colour
MX2	1: Round 2: Round Flex 3: Trimless Round 4: Trimless Round Flex 5: Square 6: Square Flex 7: Trimless Square 8: Trimless Square Flex	N: 15° M: 36° W: 50°	2: 2700K 3: 3000K 4: 4000K	1: Matt White 2: Matt Black 3: Matt Gold 4: Black Chrome	6: Textured Black 7: Textured White 0: Trimless

Example

MX28M210 Mix 26Watt Trimless Square Flex - 36° - 2700K - Matt white focus